

Antari
FOG MACHINE

PRODUCTS ARE MANUFACTURED BY ANTARI LIGHTING & EFFECTS LTD. : WWW.ANTARI.COM
FOR INFORMATION REQUESTS PLEASE CONTACT US AT : SALES@ANTARI.COM 000220260




The logo for Antari FOG MACHINE. The word "Antari" is in a large, bold, red font with a registered trademark symbol. Below it, "FOG MACHINE" is in a smaller, white, sans-serif font inside a red rectangular box. The background of the entire page is a dense field of thin, white, fiber-optic-like strands radiating from the bottom left towards the top right, creating a sense of depth and light.


Antari
FOG MACHINE

Antari 2026 PRODUCT GUIDE

2026 PRODUCT GUIDE

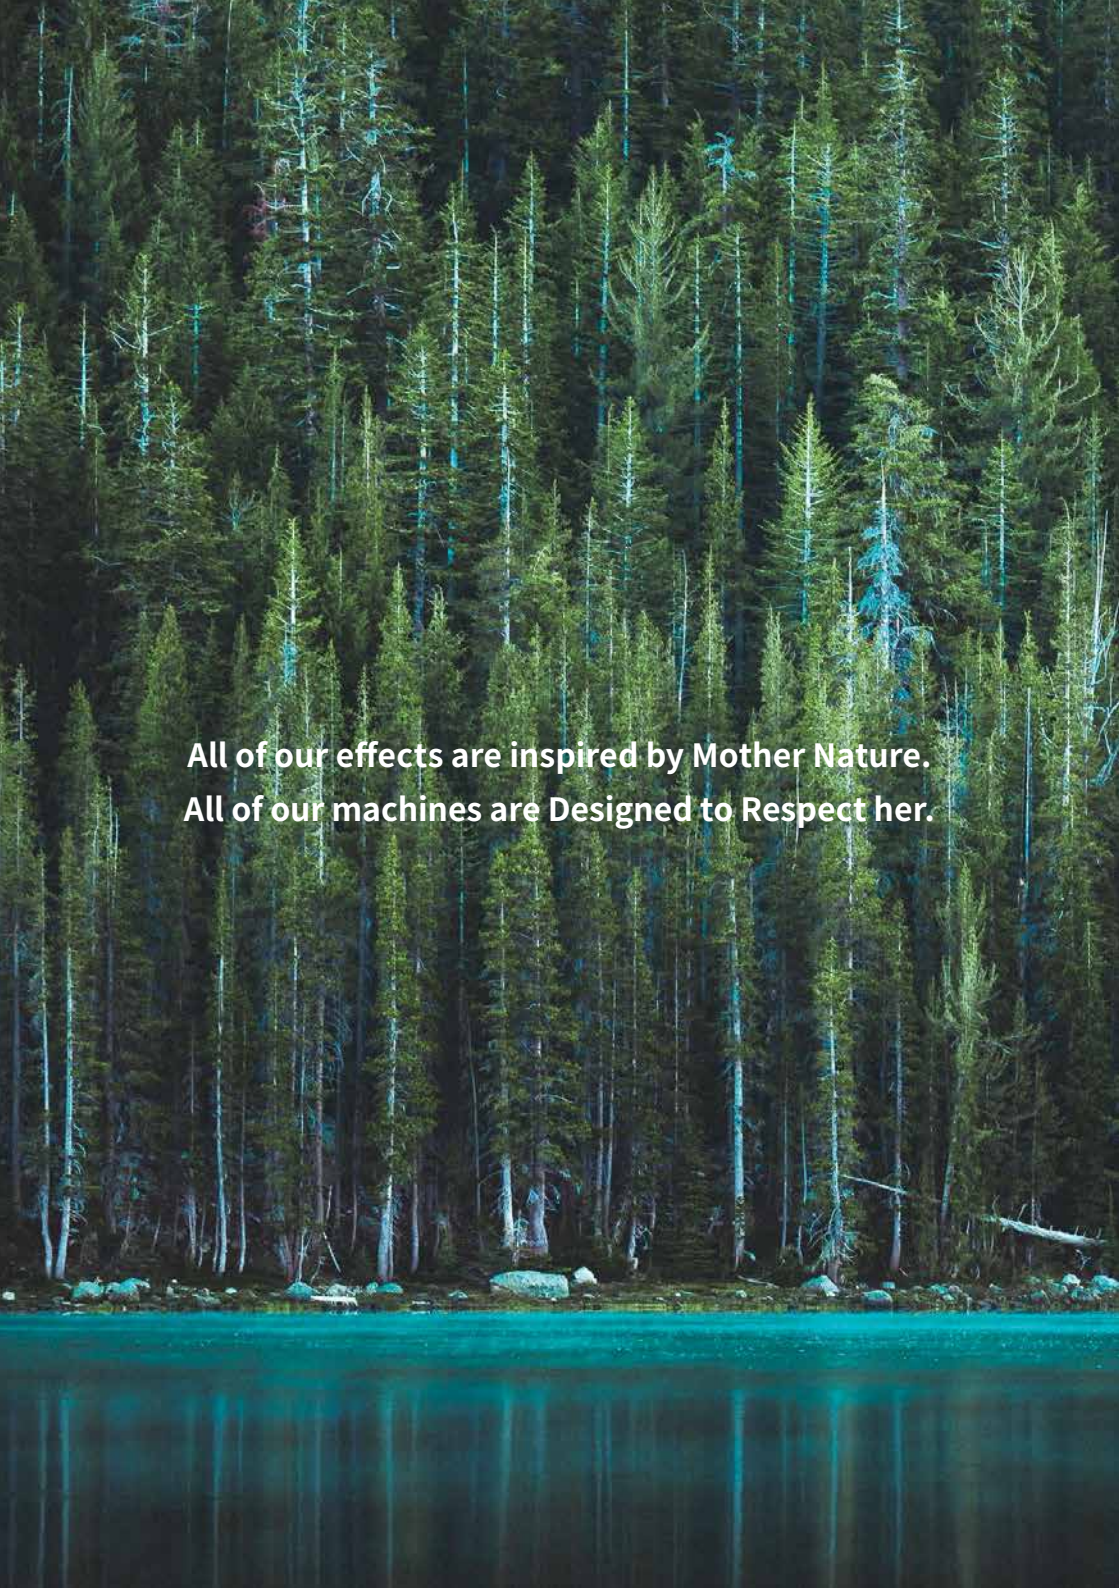A full-page background image featuring a dense forest of tall, slender evergreen trees. The trees are reflected in a calm body of water at the bottom of the frame. The overall color palette is dominated by deep greens and blues, with a soft, ethereal glow. The text is centered in the middle of the image.

**All of our effects are inspired by Mother Nature.
All of our machines are Designed to Respect her.**

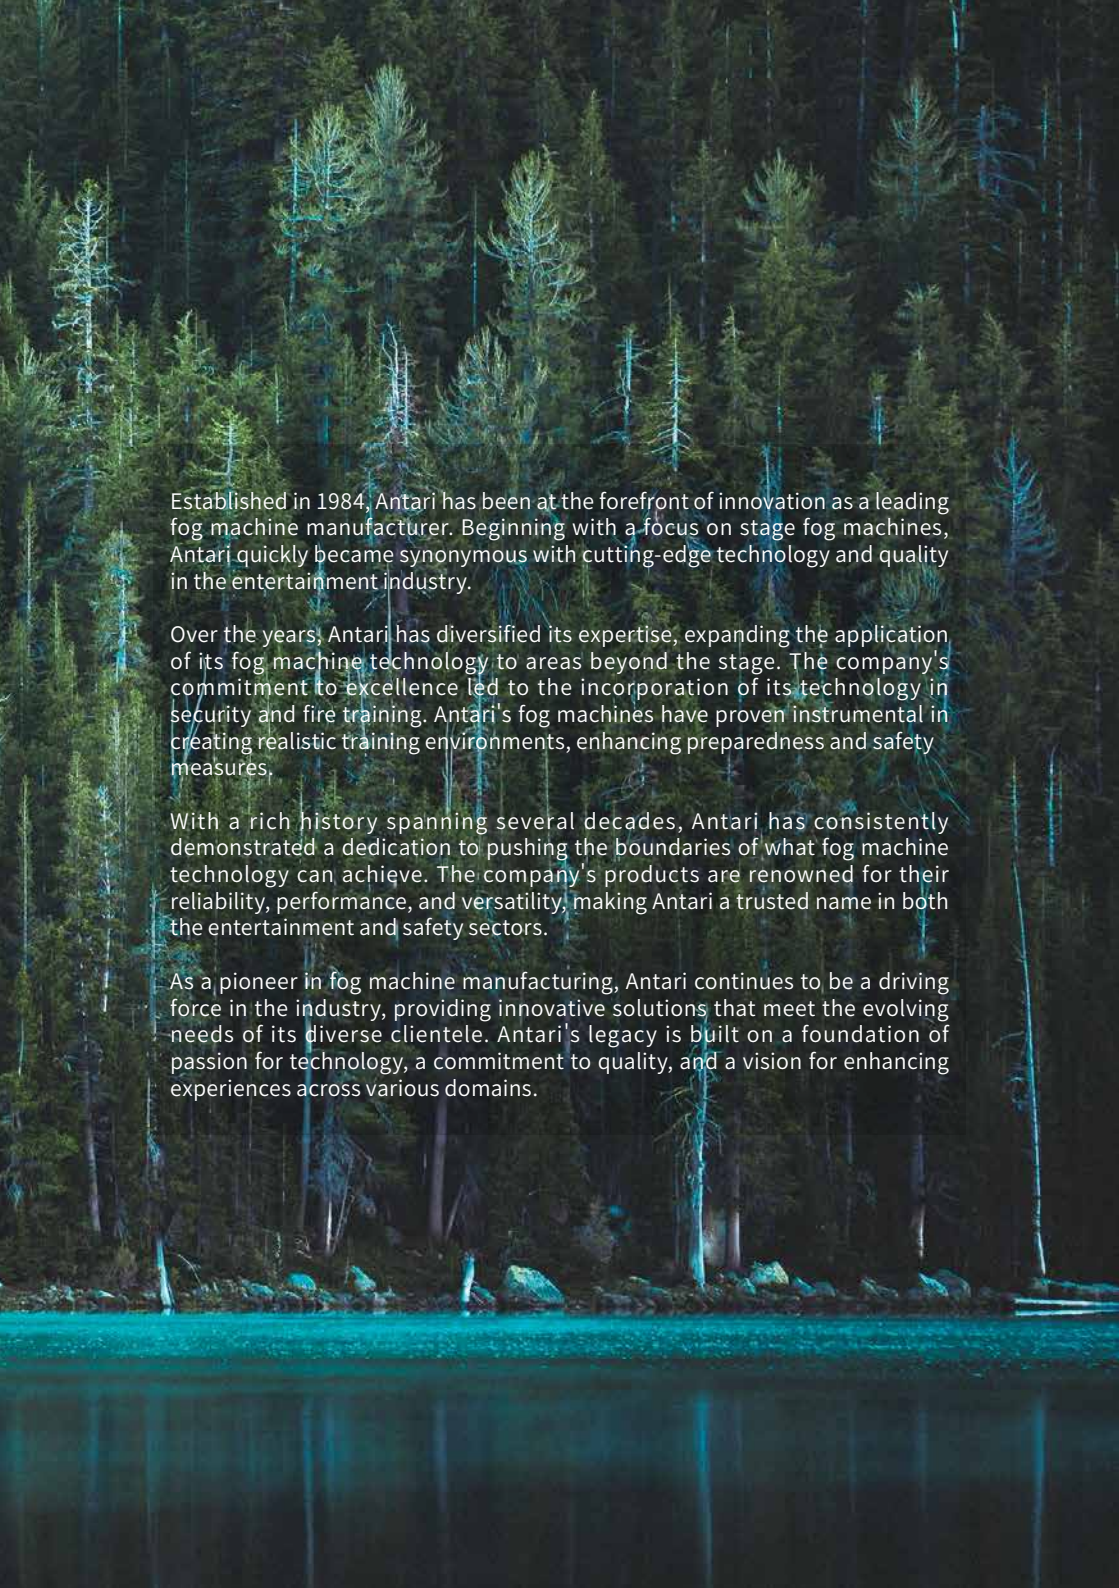A full-page background image showing a dense forest of tall, thin evergreen trees. The trees are reflected in a calm body of water at the bottom of the frame, creating a symmetrical effect. The lighting is soft, suggesting a misty or early morning atmosphere.

Established in 1984, Antari has been at the forefront of innovation as a leading fog machine manufacturer. Beginning with a focus on stage fog machines, Antari quickly became synonymous with cutting-edge technology and quality in the entertainment industry.

Over the years, Antari has diversified its expertise, expanding the application of its fog machine technology to areas beyond the stage. The company's commitment to excellence led to the incorporation of its technology in security and fire training. Antari's fog machines have proven instrumental in creating realistic training environments, enhancing preparedness and safety measures.

With a rich history spanning several decades, Antari has consistently demonstrated a dedication to pushing the boundaries of what fog machine technology can achieve. The company's products are renowned for their reliability, performance, and versatility, making Antari a trusted name in both the entertainment and safety sectors.

As a pioneer in fog machine manufacturing, Antari continues to be a driving force in the industry, providing innovative solutions that meet the evolving needs of its diverse clientele. Antari's legacy is built on a foundation of passion for technology, a commitment to quality, and a vision for enhancing experiences across various domains.

CONTENTS

NEW PRODUCT		
AF-10/AF-14	02	
J-100	03	
DNG-50	05	
STAGE ENTERTAINMENT		
UNIVERSAL VOLTAGE EFFECTS		
M-12	08	
F-12	09	
FOG EFFECTS	10	
Z-3000III	11	
Z-1500III	12	
Z-1200III	13	
Z-1000III	14	
Z-800III	15	
W-508	16	
M-8	18	
M-10	19	
M-5	20	
IP FOG EFFECTS	21	
IP-3000	21	
IP-1600	22	
FAZE EFFECTS	23	
F-8	24	
F-7X	25	
F-6	26	
F-1	27	
Z-390	28	
Z-350	29	
HAZE EFFECTS	30	
HZ-1000	31	
HZ-500	32	
HZ-400	33	
HZ-350	34	
JET FOG EFFECTS	35	
M-9	36	
M-7X	37	
Z-1520	38	
BATTERY POWER EFFECTS	39	
MB-20X	39	
MB-1	40	
CO2 FOG EFFECTS	41	
CH-1	42	
LOW FOG EFFECTS	43	
DNG-250	44	
DNG-100	45	
ICE-101	46	
SNOW EFFECTS	47	
S-600	48	
S-500	49	
S-200X	50	
S-100X	51	
SW-300	52	
SW-250	53	
BUBBLE EFFECTS	54	
W-101	55	
B-200	56	
B-100	57	
FAN EFFECTS	58	
AF-6	59	
AF-3	60	
SCENT		61
SCENT MACHINE		
SCENT		61
SCN-600		62
UV EFFECTS		63
DARKFX STRIP SERIES		
STRIP 1020		64
STRIP 510 IP		65
STRIP 510		66
DARKFX WASH SERIES		
WASH 2000 IP		67
WASH 2000		68
DARKFX SPOT		
SPOT 510 IP		69
DARKFX DRIVE		
DRIVE 4 MKII		70

ACCESSORIES 71

AFC-1 72

LIQUID SUPPLY 73

LCU-2S 73

LCU-1S 74

CONTROL MODULE 75

WTR-110, TIMO-WTR-90, 75

TIMO-WTR-80, TIMO-WTR-70,

TIMO-WTR-60, TIMO-WTR-50,

TIMO-WTR-40, WTR-20, WTR-10

TIMO-W-DMX-PCBR

REMOTE 77

M-20, M-21, M-30PRO, M-31 77

Z-3, Z-8, Z-10, Z-40, Z-50,

BCR-1, BCT-1, HC-1, HCR-1 ,

MCR-1F, MCT-2, SC-2, SC-3, SC-4

FLUID TUBES / FILTERS 79

FT-4, FT-6, FLF-4, FLF-6 79

FTA-64, FTA-66, FTA-664, FTA-44

HANGING BRACKET SET 79

M-9-HB, M-5-HB, SW-300-FB, M-12-HB 79

REMOTE CONTROL 79

EXTENSION CABLES 79

EXT-1, EXT-3, EXT-4, EXT-5, EXT-6

ADAPTORS 80

FTA-1, FTA-2A, FTA-200, FTA-11, 80

FTA-13, FT-10

FLIGHT CASE 80

FCH-1, FDNG-250, FZ-350, FX-4, 80

FX-6

FLUIDS 81

FLK 81

FOG FLUID 82

FLG, FLH, FLJ, FLR, 82

FLY, FLZ, FLL, FLC,

FLM-05P, FLM-05S

BUBBLE FLUID 82

BL 82

SNOW FLUID 83

SL-CNT, SL-UV, SL-C, SL-H, 83

SL-AN, SL-N, SL-A, SL,

HAZE FLUID 84

HZL, HZL-W 84

OTHERS 84

CHL-2, MG-550, C-300, UVL-01, 84

SCENT 84

P-1, P-2, P-4, P-6, P-7, P-9 84

ANTARI WATCH 85

ACCESSORIES LIST 87

SPEC CHART 91



Powerful Wind. Silent Operation. IP55 Durability.

The Antari AF-10/AF-14 is high-velocity fans engineered for professional use, combining power, precision, and durability.

Featuring a unique swirl-shaped front cover, they maintain focused airflow while reducing turbulence and noise. The specially designed aerodynamic blades ensure optimal air distribution with minimal sound, making them ideal for stage, studio, and installation environments.

Built with robust materials for reliable performance, can operate with a simple plug to start or integrate with an optional control box for remote operation.

Whether for fog dispersion or wind effects, the AF-10/AF-14 delivers efficient, quiet, and consistent airflow in demanding applications.



AF-10 / AF-14



CONTROL METHODS



MANUAL TIMER 5PIN

OPTIONAL



WIRELESS W-DMX

RATED POWER

AF-10	AF-14
120V 60W	120V 190W
240V 65W	240V 145W

INCLUDED ACCESSORIES

- AFC-1 FAN CONTROL
- DUAL USE BRACKET

INPUT VOLTAGE

AF-10	US MODEL : AC 100 - 120V, 50 / 60 Hz 0.5A EU MODEL : AC 220 - 240V, 50 / 60 Hz 0.5A
AF-14	US MODEL : AC 100 - 120V, 50 / 60 Hz 2.0A EU MODEL : AC 220 - 240V, 50 / 60 Hz 1.0A

DIMENSION



AF-10		
L 326 MM	L 12.84	INCH
W 535 MM	W 21.07	INCH
H 487 MM	H 19.18	INCH

AF-14		
L 432 MM	L 17.00	INCH
W 656 MM	W 25.83	INCH
H 623 MM	H 24.53	INCH

WEIGHT



AF-10
8.2 KG
18.08 LBS

AF-14
14.8 KG
32.63 LBS



SEETRONIC IP65
Connector (Power)



For professionals who need power on cue, the J-100 makes every burst unforgettable.

The Antari J-100 is a next-generation jet fog machine designed to elevate stage effects to a whole new level. Equipped with a high-performance turbo fan, the J-100 delivers powerful, directional fog bursts that cut through large venues with precision and intensity.

It combines rugged reliability with a sleek, compact design — making it the ultimate tool for live shows, concerts, theme parks, and touring productions that demand impact, speed, and style. Experience the force of fog — reimagined, refined, and raised higher with the J-100.

Elevate your stage with Antari SonicJet.





J-100



CONTROL METHODS



MANUAL TIMER 5PIN

OPTIONAL



WIRELESS W-DMX

RATED POWER

2400W

INCLUDED ACCESSORIES

- › HANGING BRACKET
- › BOTTLE HOLDER

INPUT VOLTAGE

EU MODEL : AC 220 ~ 240V, 50 / 60 Hz 10.0A

FLUID CONSUMPTION

180 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



DIMENSION



L 424 MM	L 16.69 INCH
W 390 MM	W 15.36 INCH
H 440 MM	H 17.32 INCH

WEIGHT



18.7 KG
41.23 LBS



SEETRONIC IP65
Connector (Power)



Own the Stage — From the Ground Up

The DNG-50 delivers smooth, ground-hugging fog using advanced ultrasonic technology—no dry ice or liquid CO₂ required. Designed for small to medium-sized venues, it produces clean, consistent low fog ideal for weddings, theaters, studios, and special events. Compact, quiet, and energy-efficient.

Its perfect mix ratio keeps the fog close to the ground, creating immersive atmospheres with ease.

Whether for permanent installs or mobile setups, the DNG-50 provides professional-grade fog effects with exceptional reliability and visual impact.



DNG-50



CONTROL METHODS



MANUAL TIMER 5PIN/3PIN

OPTIONAL



WIRELESS W-DMX

RATED POWER

1200W

INCLUDED ACCESSORIES

> 1.5 METER FOG CONDUCTING HOSE

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 10.0A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 5.0A

FLUID CONSUMPTION

16 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



> FLJ
> FLK
> FLL

DIMENSION



L 865 MM	L 34.06 INCH
W 355 MM	W 13.98 INCH
H 517 MM	H 20.36 INCH


WEIGHT



25.4 KG
56.00 LBS



SEETRONIC
Connector (Power)

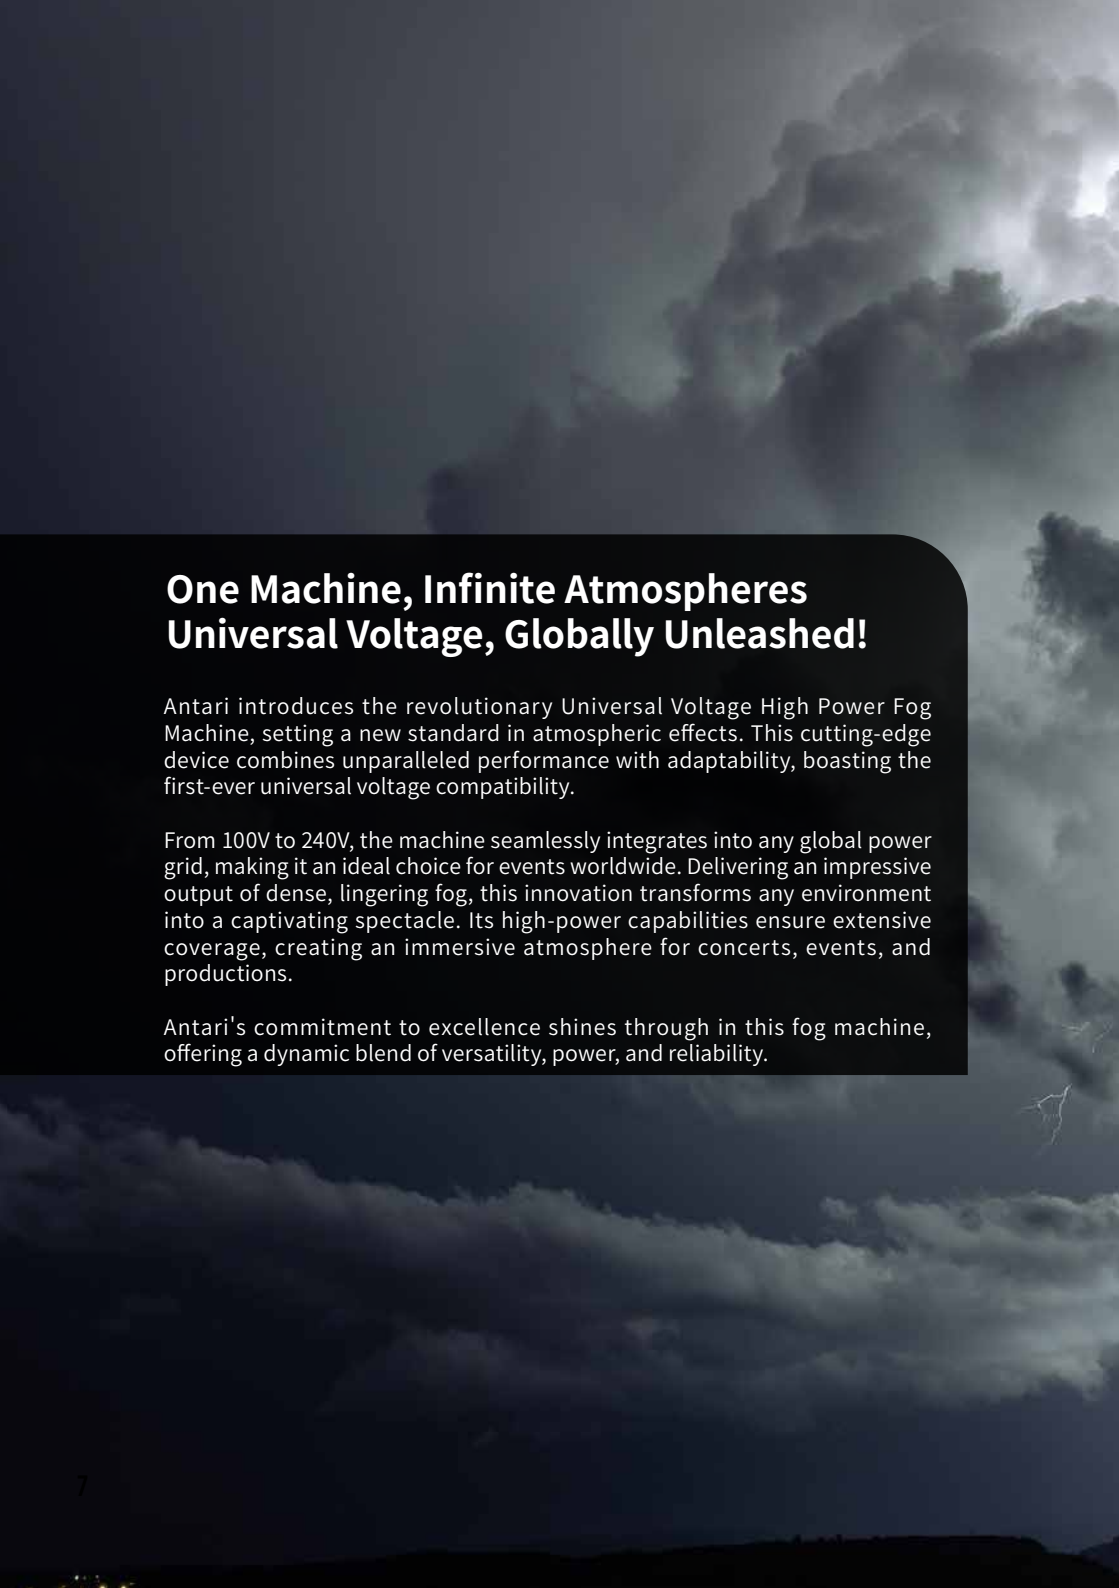

One Machine, Infinite Atmospheres Universal Voltage, Globally Unleashed!

Antari introduces the revolutionary Universal Voltage High Power Fog Machine, setting a new standard in atmospheric effects. This cutting-edge device combines unparalleled performance with adaptability, boasting the first-ever universal voltage compatibility.

From 100V to 240V, the machine seamlessly integrates into any global power grid, making it an ideal choice for events worldwide. Delivering an impressive output of dense, lingering fog, this innovation transforms any environment into a captivating spectacle. Its high-power capabilities ensure extensive coverage, creating an immersive atmosphere for concerts, events, and productions.

Antari's commitment to excellence shines through in this fog machine, offering a dynamic blend of versatility, power, and reliability.



M-12



CONTROL METHODS



MANUAL TIMER 5PIN/3PIN

OPTIONAL



WIRELESS W-DMX

RATED POWER

120V 17.0A 2000W
240V 8.5A 2000W

INCLUDED ACCESSORIES

N/A

INPUT VOLTAGE

AC 100 - 240V, 50 / 60 HZ

FLUID CONSUMPTION

400 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



› FLG › FLR
› FLH › FLY
› FLJ › FLZ

DIMENSION



L 646 MM	L 25.43 INCH
W 280 MM	W 11.02 INCH
H 283 MM	H 11.14 INCH

WEIGHT



27.2 KG
59.97 LBS



Neutrik
powerCON
TRUE 1
Connector Power



F-12 NEBULA

CONTROL METHODS



MANUAL



TIMER



5PIN/3PIN



WIRELESS



W-DMX

OPTIONAL

RATED POWER

- 100V 6.0A 550W
- 120V 6.5A 750W
- 240V 6.0A 1400W

INCLUDED ACCESSORIES

N/A

INPUT VOLTAGE

AC 100 - 240V, 50 / 60 Hz

FLUID CONSUMPTION

9 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



- FLG-5E
- FLH-5E

DIMENSION



L 399 MM
W 444 MM
H 268 MM

L 15.70 INCH
W 17.48 INCH
H 10.56 INCH

WEIGHT



14.6 KG
32.18 LBS



Neutrik
powerCON
TRUE 1
Connector Power



FOG MACHINE

Antari Fog Machine – your gateway to the pinnacle of atmospheric innovation.

Dive into a world of possibilities with our cutting-edge Fog Machine collection, featuring the versatile Antari Fog Machine, Fazer Machine, Hazer Machine, and the enchanting Low Fog Machine.

This curated pages showcases the epitome of ambiance creation, offering a spectrum of choices to suit every setting. From the mysterious vapor of the fogger to the fine mist of the Fazer to the ethereal allure of the Hazer and the ground-hugging magic of the Low Fog Machine, each product is designed for unmatched atmospheric excellence.

Elevate your events with Antari – where innovation meets enchantment.





Z-3000III

CONTROL METHODS



MANUAL



TIMER



5PIN/3PIN



WIRELESS

OPTIONAL

RATED POWER

2500W

INCLUDED ACCESSORIES

N/A

INPUT VOLTAGE

EU MODEL : AC 220 - 240V, 50 / 60 Hz 10.5A

FLUID CONSUMPTION

250 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



- › FLG
- › FLH
- › FLJ
- › FLR
- › FLY
- › FLZ

DIMENSION



L	712	MM	L	28.03	INCH
W	275	MM	W	10.82	INCH
H	278	MM	H	10.94	INCH

WEIGHT



19.1 KG
42.10 LBS



Neutrik
powerCON
TRUE 1
Connector Power



Z-1500III



CONTROL METHODS



MANUAL TIMER 5PIN/3PIN

OPTIONAL



WIRELESS

RATED POWER

1500W

INCLUDED ACCESSORIES

N/A

INPUT VOLTAGE

US MODEL : AC 100 - 120V, 50 / 60 Hz 12.5A

EU MODEL : AC 220 - 240V, 50 / 60 Hz 6.5A

FLUID CONSUMPTION

150 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



> FLG > FLR
 > FLH > FLY
 > FLJ > FLZ

DIMENSION



L 674 MM	L 26.54 INCH
W 235 MM	W 9.25 INCH
H 278 MM	H 10.94 INCH

WEIGHT



13.3 KG
 29.32 LBS



Neutrik
 powerCON
 TRUE 1
 Connector Power



Z-1200III

CONTROL METHODS



OPTIONAL



RATED POWER

1200W

INCLUDED ACCESSORIES

› HANGING BRACKET

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 10.0A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 5.0A

FLUID CONSUMPTION

85 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



› FLG › FLR
› FLH › FLY
› FLJ › FLZ

DIMENSION



L 458 MM	L 18.03 INCH
W 320 MM	W 12.60 INCH
H 326 MM	H 12.84 INCH

WEIGHT



11.0 KG
24.25 LBS



IEC
Connector (Power)



Z-1000III



CONTROL METHODS



MANUAL

3PIN

CABLE

OPTIONAL



TIMER

WIRELESS

RATED POWER

1000W

INCLUDED ACCESSORIES

- › HANGING BRACKET
- › Z-10 CABLE REMOTE

FLUID CONSUMPTION

60 ML/MIN (100% OUTPUT)

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 8.5A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 4.5A

COMPATIBLE FLUID



- › FLG
- › FLH
- › FLR

DIMENSION



L 433 MM
W 281 MM
H 266 MM

L 17.05 INCH
W 11.06 INCH
H 10.48 INCH

WEIGHT



7.9 KG
17.41 LBS




IEC
Connector (Power)



Z-800III

CONTROL METHODS



MANUAL CABLE

OPTIONAL



TIMER WIRELESS

RATED POWER

800W

INCLUDED ACCESSORIES

› Z-10 CABLE REMOTE

INPUT VOLTAGE

US MODEL : AC 100 - 120V, 50 / 60 Hz 7.0A

EU MODEL : AC 220 - 240V, 50 / 60 Hz 3.5A

FLUID CONSUMPTION

13 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



› FLG
› FLH
› FLR

DIMENSION



L 315 MM	L 12.40 INCH
W 128 MM	W 5.04 INCH
H 218 MM	H 8.58 INCH

WEIGHT



4.2 KG
9.26 LBS



W-508



CONTROL METHODS



MANUAL WIRELESS

OPTIONAL

N/A

RATED POWER

800W

INCLUDED ACCESSORIES

› W-1 WIRELESS TRANSMITTER

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 7.0A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 3.5A

FLUID CONSUMPTION

13 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



› FLG
› FLH
› FLR

DIMENSION




L 315 MM	L 12.40 INCH
W 128 MM	W 5.04 INCH
H 218 MM	H 8.58 INCH

WEIGHT



3.8 KG
8.38 LBS

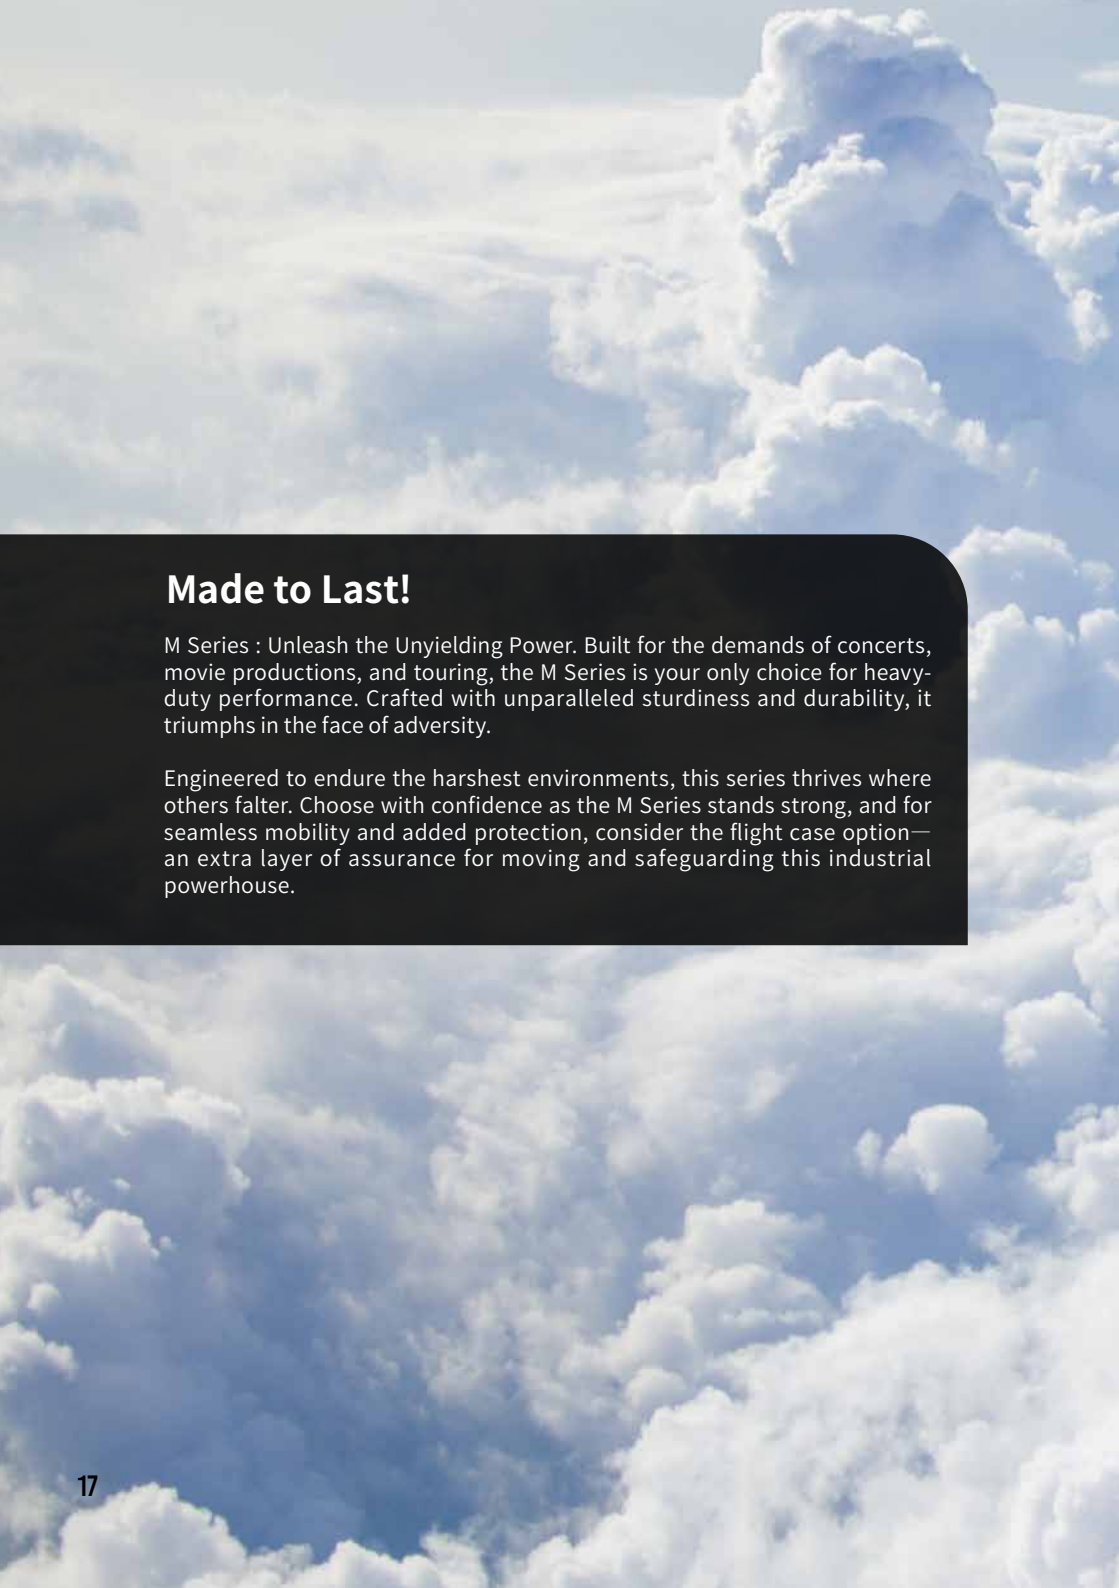

Made to Last!

M Series : Unleash the Unyielding Power. Built for the demands of concerts, movie productions, and touring, the M Series is your only choice for heavy-duty performance. Crafted with unparalleled sturdiness and durability, it triumphs in the face of adversity.

Engineered to endure the harshest environments, this series thrives where others falter. Choose with confidence as the M Series stands strong, and for seamless mobility and added protection, consider the flight case option—an extra layer of assurance for moving and safeguarding this industrial powerhouse.



M-8



CONTROL METHODS



MANUAL



TIMER



5PIN/3PIN



WIRELESS

OPTIONAL

RATED POWER

1700W

INCLUDED ACCESSORIES

› M-21 CONTROL UNIT

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 15.0A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 7.5A

FLUID CONSUMPTION

240 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



› FLG
› FLH
› FLR

DIMENSION



L 668 MM	L 26.30 INCH
W 320 MM	W 12.60 INCH
H 276 MM	H 10.87 INCH

WEIGHT



22.0 KG
48.50 LBS



Neutrik
powerCON
Connector (Power)



M-10

CONTROL METHODS



MANUAL



TIMER



5PIN/3PIN



WIRELESS

OPTIONAL

RATED POWER

3000W

INCLUDED ACCESSORIES

› M-20 CONTROL UNIT

INPUT VOLTAGE

EU MODEL : AC 220 - 240V, 50 / 60 Hz 12.5A

FLUID CONSUMPTION

250 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



› FLG
› FLH
› FLR

DIMENSION



L 697 MM

W 319 MM

H 300 MM

L 27.44 INCH

W 12.56 INCH

H 11.82 INCH

WEIGHT



25.8 KG

56.88 LBS



Neutrik
powerCON
Connector (Power)



M-5



CONTROL METHODS



MANUAL



TIMER



5PIN/3PIN



WIRELESS

OPTIONAL

RATED POWER

1500W

INCLUDED ACCESSORIES

› M-20 CONTROL UNIT

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 12.5A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 6.5A

FLUID CONSUMPTION

160 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



› FLG
› FLH
› FLR

DIMENSION



L 668 MM	L 26.30 INCH
W 320 MM	W 12.60 INCH
H 276 MM	H 10.87 INCH

WEIGHT



15.5 KG
34.17 LBS



Neutrik
powerCON
Connector (Power)



IP-3000

CONTROL METHODS



MANUAL TIMER 5PIN WIRELESS

OPTIONAL

N/A

RATED POWER

120V 1700W
240V 2500W

INCLUDED ACCESSORIES

- › W-2 WIRELESS TRANSMITTER
- › HANGING BRACKET

FLUID CONSUMPTION

250 ML/MIN (100% OUTPUT)

INPUT VOLTAGE

US MODEL : AC 100 ~ 120V, 50 / 60 Hz 14.5A
EU MODEL : AC 220 ~ 240V, 50 / 60 Hz 10.5A

COMPATIBLE FLUID



- › FLG
- › FLH
- › FLJ
- › FLR
- › FLY
- › FLZ

DIMENSION



L 511 MM	L 20.12 INCH
W 314 MM	W 12.37 INCH
H 394 MM	H 15.52 INCH

WEIGHT



18.6 KG
41.01 LBS



Neutrik
powerCON
TRUE 1
Connector Power



IP-1600



CONTROL METHODS



MANUAL TIMER 5PIN WIRELESS

OPTIONAL

N/A

RATED POWER

1500W

INCLUDED ACCESSORIES

- › W-2 WIRELESS TRANSMITTER
- › HANGING BRACKET

FLUID CONSUMPTION

150 ML/MIN (100% OUTPUT)

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 12.5A
EU MODEL : AC 220 – 240V, 50 / 60 Hz 6.5A

COMPATIBLE FLUID



- › FLG
- › FLH
- › FLJ
- › FLR
- › FLY
- › FLZ

DIMENSION



L 478 MM	L 18.82 INCH
W 277 MM	W 10.90 INCH
H 358 MM	H 14.10 INCH


WEIGHT



12.6 KG
27.78 LBS



Neutrik
powerCON
TRUE 1
Connector Power

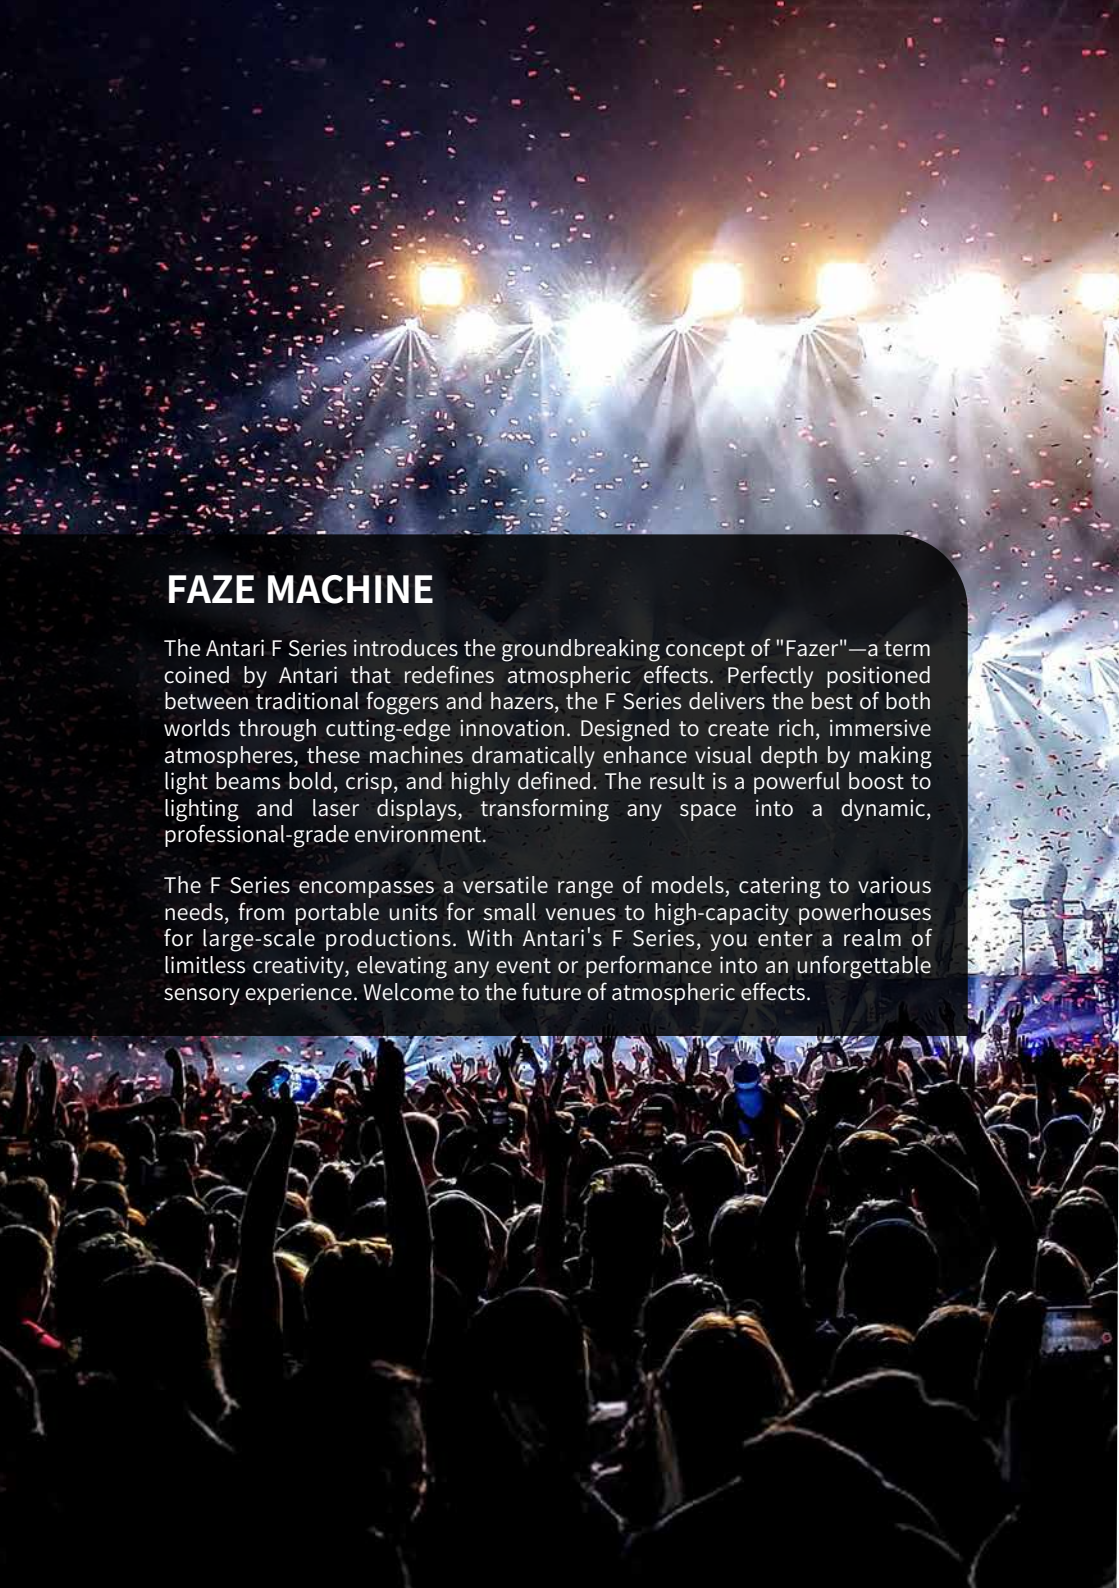A large crowd of people at a concert, seen from behind, with many arms raised. Above them, a stage is lit with several bright spotlights, and a shower of red and white confetti is falling from the ceiling, creating a festive atmosphere.

FAZE MACHINE

The Antari F Series introduces the groundbreaking concept of "Fazer"—a term coined by Antari that redefines atmospheric effects. Perfectly positioned between traditional foggers and hazers, the F Series delivers the best of both worlds through cutting-edge innovation. Designed to create rich, immersive atmospheres, these machines dramatically enhance visual depth by making light beams bold, crisp, and highly defined. The result is a powerful boost to lighting and laser displays, transforming any space into a dynamic, professional-grade environment.

The F Series encompasses a versatile range of models, catering to various needs, from portable units for small venues to high-capacity powerhouses for large-scale productions. With Antari's F Series, you enter a realm of limitless creativity, elevating any event or performance into an unforgettable sensory experience. Welcome to the future of atmospheric effects.

**F-8****CONTROL METHODS**

MANUAL TIMER 5PIN/3PIN

OPTIONAL

WIRELESS W-DMX

RATED POWER

3500W

INCLUDED ACCESSORIES

N/A

INPUT VOLTAGE

EU MODEL : AC 220 - 240V, 50 / 60 Hz 14.5A

FLUID CONSUMPTION

200 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID

- › FLG-20
- › FLH-20
- › FLR-20

› FLZ-20

DIMENSION

L 804 MM	L 31.66 INCH
W 677 MM	W 26.66 INCH
H 976 MM	H 38.43 INCH

WEIGHT

100.0 KG
220.47 LBS



Neutrik
powerCON
TRUE 1
Connector Power



F-7X

CONTROL METHODS



MANUAL



TIMER



5PIN/3PIN



WIRELESS



W-DMX

OPTIONAL

RATED POWER

100V 1400W
120V 1600W
240V 1900W

INCLUDED ACCESSORIES

N/A

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 13.5A
EU MODEL : AC 220 – 240V, 50 / 60 Hz 8.0A

FLUID CONSUMPTION

FOG MODE : 150 ML/MIN (100% OUTPUT)
FAZE MODE : 28 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



• FLG-5E
• FLH-5E
• FLZ-5E

DIMENSION



L 728 MM	L 28.66 INCH
W 428 MM	W 16.85 INCH
H 719 MM	H 28.31 INCH

WEIGHT



53.0 KG
116.85 LBS



Neutrik
powerCON
TRUE 1
Connector Power

**F-6****CONTROL METHODS**

MANUAL TIMER 5PIN

OPTIONAL

WIRELESS W-DMX

RATED POWER

1450W

INCLUDED ACCESSORIES

N/A

INPUT VOLTAGE

US MODEL : AC 100 - 120V, 50 / 60 Hz 12.5A

EU MODEL : AC 220 - 240V, 50 / 60 Hz 6.5A

FLUID CONSUMPTION

12 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID

• FLG-5E

DIMENSION

L 493 MM	L 19.40 INCH
W 424 MM	W 16.69 INCH
H 280 MM	H 11.02 INCH

WEIGHT

17.2 KG
37.92 LBS



Neutrik
powerCON
TRUE 1
Connector Power



F-1

CONTROL METHODS



MANUAL



TIMER



5PIN/3PIN



WIRELESS



W-DMX

OPTIONAL

RATED POWER

800W

INCLUDED ACCESSORIES

N/A

INPUT VOLTAGE

US MODEL : AC 100 - 120V, 50 / 60 Hz 7.0A

EU MODEL : AC 220 - 240V, 50 / 60 Hz 3.5A

FLUID CONSUMPTION

8.5ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



- › FLG
- › FLH
- › FLR
- › FLY
- › FLZ

DIMENSION



L 618 MM

W 275 MM

H 382 MM

L 24.33 INCH

W 10.83 INCH

H 15.04 INCH

WEIGHT



14.1 KG

31.09 LBS



Neutrik
powerCON
Connector (Power)



Z-390



CONTROL METHODS



MANUAL TIMER 5PIN/3PIN

OPTIONAL



WIRELESS CABLE

RATED POWER

› 120V 1000W
› 240V 1450W

INCLUDED ACCESSORIES

› HANGING BRACKET

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 8.5A
EU MODEL : AC 220 – 240V, 50 / 60 Hz 6.5A

FLUID CONSUMPTION

8 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



› FLG
› FLH

DIMENSION



L 368 MM	L 14.49 INCH
W 340 MM	W 13.39 INCH
H 344 MM	H 13.55 INCH

WEIGHT



9.7 KG
21.38 LBS



IEC
Connector (Power)



Z-350

CONTROL METHODS



MANUAL 3PIN

OPTIONAL



CABLE

RATED POWER

120V 700W
240V 750W

INCLUDED ACCESSORIES

N/A

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 6.0A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 3.5A

FLUID CONSUMPTION

3 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



• FLG
• FLH

DIMENSION



L 320 MM	L 12.60 INCH
W 153 MM	W 6.02 INCH
H 391 MM	H 15.39 INCH


WEIGHT



8.7 KG
19.18 LBS



IEC
Connector (Power)

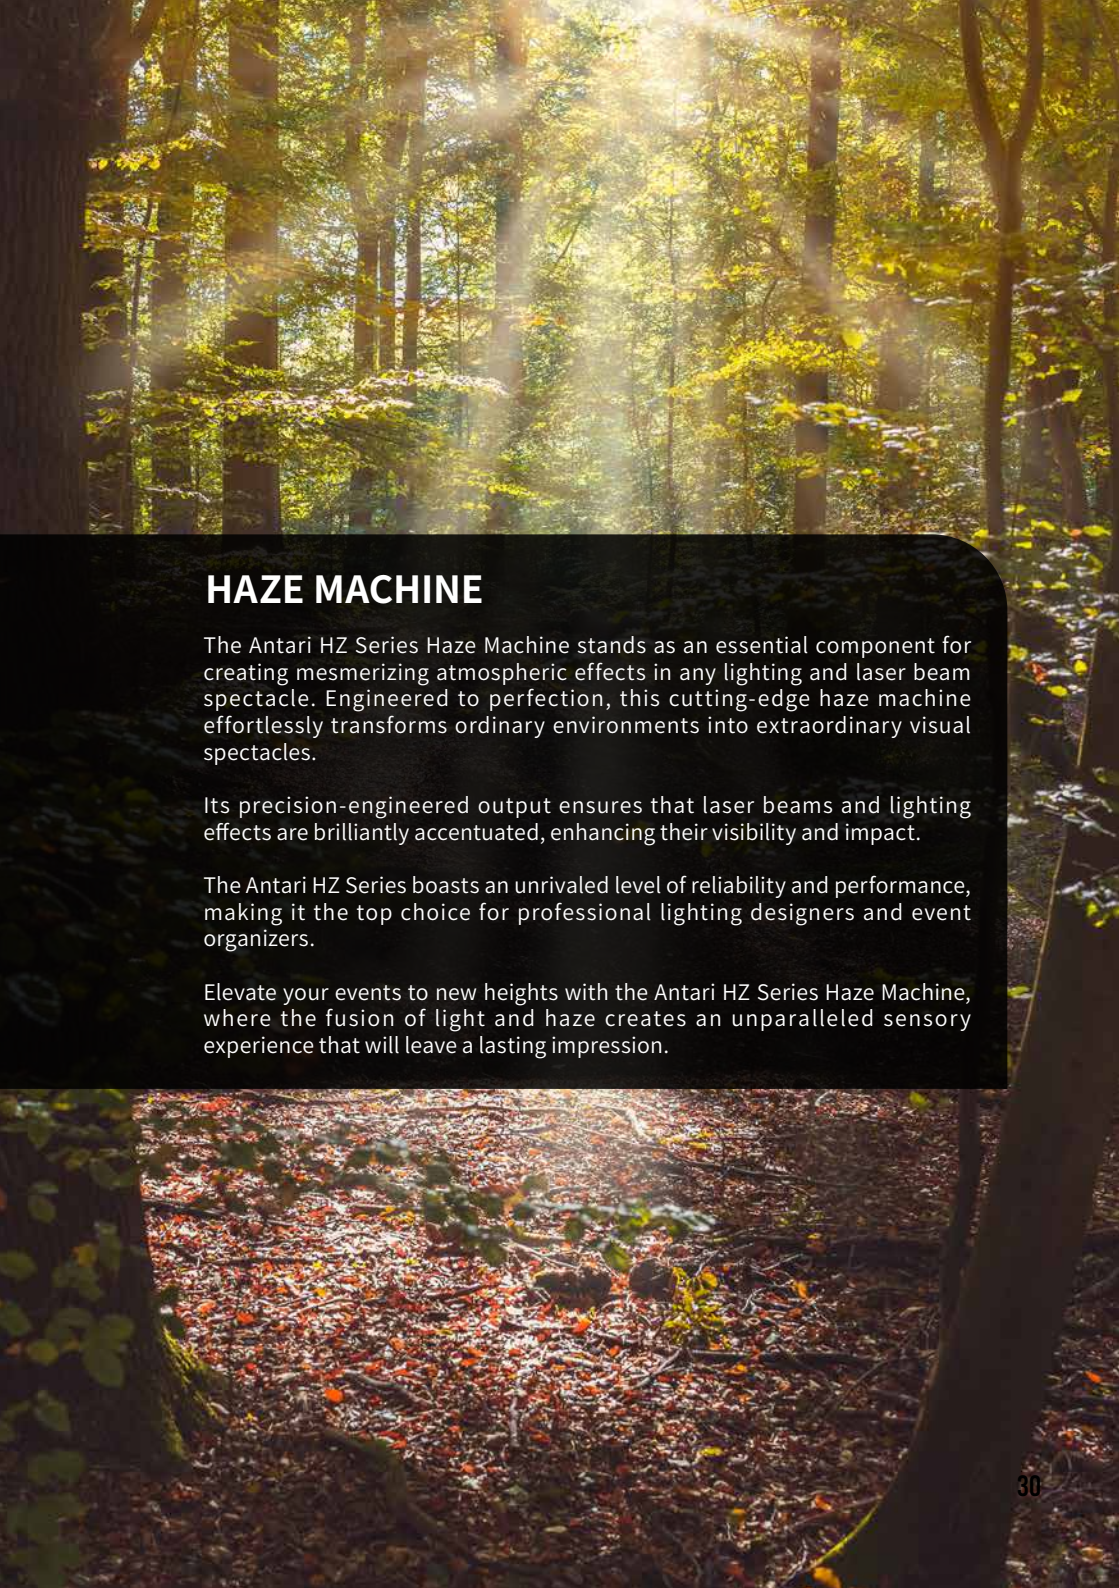

HAZE MACHINE

The Antari HZ Series Haze Machine stands as an essential component for creating mesmerizing atmospheric effects in any lighting and laser beam spectacle. Engineered to perfection, this cutting-edge haze machine effortlessly transforms ordinary environments into extraordinary visual spectacles.

Its precision-engineered output ensures that laser beams and lighting effects are brilliantly accentuated, enhancing their visibility and impact.

The Antari HZ Series boasts an unrivaled level of reliability and performance, making it the top choice for professional lighting designers and event organizers.

Elevate your events to new heights with the Antari HZ Series Haze Machine, where the fusion of light and haze creates an unparalleled sensory experience that will leave a lasting impression.



HZ-1000

CONTROL METHODS



MANUAL



TIMER



5PIN/3PIN



W-DMX

OPTIONAL

RATED POWER

1150W

INCLUDED ACCESSORIES

N/A

INPUT VOLTAGE

US MODEL : AC 100 - 120V, 50 / 60 Hz 10.0A

EU MODEL : AC 220 - 240V, 50 / 60 Hz 5.0A

FLUID CONSUMPTION

2.2 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



- HZL
- HZL-W

DIMENSION



L 690 MM

W 510 MM

H 610 MM

L 27.16 INCH

W 20.07 INCH

H 24.01 INCH

WEIGHT



74.6 KG

164.46 LBS



Neutrik
powerCON
TRUE 1
Connector Power



HZ-500



CONTROL METHODS



MANUAL TIMER 5PIN

OPTIONAL

N/A

RATED POWER

120V 400W
240V 480W

INCLUDED ACCESSORIES

N/A

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 3.5A
EU MODEL : AC 220 – 240V, 50 / 60 Hz 2.0A

FLUID CONSUMPTION

1.1 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



▸ HZL
▸ HZL-W

DIMENSION



L 515 MM	L 20.28 INCH
W 375 MM	W 14.77 INCH
H 355 MM	H 13.98 INCH

WEIGHT



31.5 KG
69.45 LBS



IEC
Connector (Power)



HZ-400

CONTROL METHODS



MANUAL TIMER 3PIN CABLE

OPTIONAL



WIRELESS

RATED POWER

470W

INCLUDED ACCESSORIES

› HC-1 CABLE TIMER REMOTE

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 4.0A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 2.0A

FLUID CONSUMPTION

1.1 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



› HZL
› HZL-W

DIMENSION



L 510 MM	L 20.08 INCH
W 320 MM	W 12.60 INCH
H 325 MM	H 12.80 INCH

WEIGHT



18.5 KG
40.79 LBS



IEC
Connector (Power)



HZ-350



CONTROL METHODS



MANUAL



TIMER



5PIN



WIRELESS



CABLE

OPTIONAL

RATED POWER

390W

INCLUDED ACCESSORIES

› W-1 WIRELESS TRANSMITTER

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 3.5A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 2.0A

FLUID CONSUMPTION

0.8 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



› HZL
› HZL-W

DIMENSION



L 492 MM

W 273 MM

H 315 MM

L 19.37 INCH

W 10.75 INCH

H 12.40 INCH

WEIGHT



14.2 KG

31.31 LBS



IEC

Connector (Power)



Jet Fog Machines Redefined Power, Precision, Performance

Antari jet fog machines deliver unparalleled power and precision for professional applications.

Designed to create dynamic vertical or horizontal fog effects, these machines are perfect for live events, concerts, and theatrical productions.

Equipped with cutting-edge technology, it offers rapid heat-up times, massive output, and consistent performance. Its robust construction ensures reliability in demanding environments.

It is designed for ease of use, whether for dazzling stage effects or impactful special effects, Antari's jet fog is the ultimate choice.



M-9



CONTROL METHODS



MANUAL

TIMER

5PIN/3PIN

MASTER
SLAVE

WIRELESS

OPTIONAL



W-DMX

RATED POWER

1820W

INCLUDED ACCESSORIES

› W-2 WIRELESS TRANSMITTER

INPUT VOLTAGE

US MODEL : AC 100 - 120V, 50 / 60 Hz 15.5A

EU MODEL : AC 220 - 240V, 50 / 60 Hz 8.0A

FLUID CONSUMPTION

400 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



› FLC

DIMENSION



L 393 MM	L 15.47 INCH
W 321 MM	W 12.63 INCH
H 420 MM	H 16.53 INCH

WEIGHT



25.0 KG
55.10 LBS



Neutrik
powerCON
TRUE 1
Connector Power



M-7X

CONTROL METHODS



MANUAL



TIMER



5PIN/3PIN

MASTER
SLAVE

WIRELESS

OPTIONAL



W-DMX

RATED POWER

1516W

INCLUDED ACCESSORIES

› W-2 WIRELESS TRANSMITTER

INPUT VOLTAGE

US MODEL : AC 100 - 120V, 50 / 60 Hz 13.0A

EU MODEL : AC 220 - 240V, 50 / 60 Hz 6.5A

FLUID CONSUMPTION

200 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



› FLC

DIMENSION



L 346 MM

L 13.62 INCH

W 193 MM

W 7.60 INCH

H 383 MM

H 15.00 INCH

WEIGHT



14.0 KG

30.80 LBS



Neutrik
powerCON
TRUE 1
Connector Power



Z-1520



CONTROL METHODS



OPTIONAL

N/A

RATED POWER

1516W

INCLUDED ACCESSORIES

› W-2 WIRELESS TRANSMITTER

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 13.0A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 6.5A


FLUID CONSUMPTION

150 ML/MIN (100% OUTPUT)


COMPATIBLE FLUID



DIMENSION



WEIGHT



Neutrik
powerCON
Connector (Power)



MB-20X

CONTROL METHODS



MANUAL

3PIN

OPTIONAL



WIRELESS

CABLE

RATED POWER

600W

INCLUDED ACCESSORIES

- › FLM-05P FOG FLUID 500 ML
- › MB-20X-B BATTERY
- › FFT-20 FLIGHTCASE
- › MB-20X-BCL CHARGER

INPUT VOLTAGE

- DC 12V (RECHARGEABLE BATTERY)
- AC 100 - 240V ,50 /60 Hz (BATTERY CHARGER)

FLUID CONSUMPTION

16 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



› FLM-05P

DIMENSION



L	293	MM	L	11.54	INCH
W	108	MM	W	4.26	INCH
H	239	MM	H	9.41	INCH

WEIGHT



8.5 KG
18.74 LBS



MB-1



CONTROL METHODS



MANUAL

OPTIONAL



TIMER



WIRELESS



CABLE

RATED POWER

75W

INCLUDED ACCESSORIES

►FLM-05S FOG FLUID 500ML

►BAT-01 BATTERY

►FLIGHTCASE

►MB-1-BCL CHARGER

INPUT VOLTAGE

DC 12V (BATTERY)

AC 100 - 240V, 50 / 60 Hz (BATTERY CHARGER)

FLUID CONSUMPTION

1.1 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



► FLM-05S

DIMENSION



L 225 MM

W 67 MM

H 113 MM

L 8.86 INCH

W 2.64 INCH


H 4.49 INCH

WEIGHT



WITHOUT BATTERY : 1.0 KG (2.20 LBS)

WITH BATTERY : 1.8 KG (3.97 LBS)

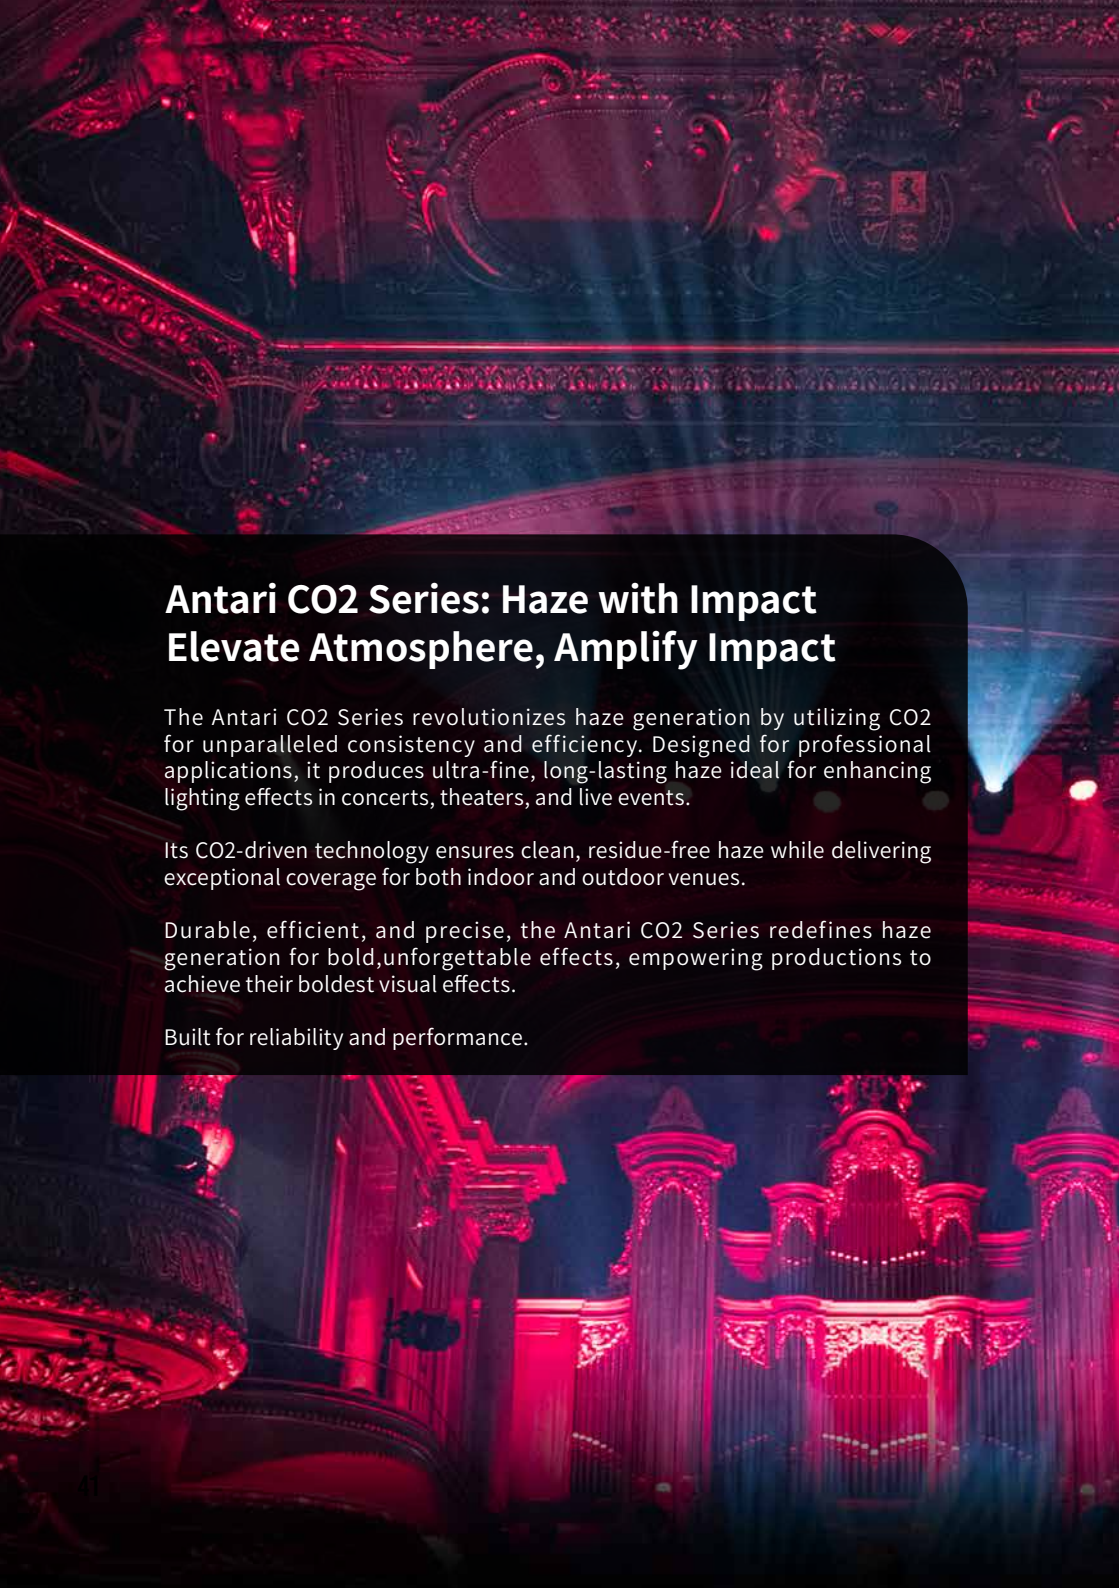The background of the entire advertisement is a photograph of a grand theater interior. The top half shows the ornate ceiling with intricate carvings and a central crest, bathed in deep red light. Streaks of white haze or smoke are visible against the ceiling. The bottom half shows the theater's facade, featuring tall columns and a large organ, also illuminated with red light. A bright blue spotlight beam cuts through the haze on the right side of the image.

Antari CO2 Series: Haze with Impact Elevate Atmosphere, Amplify Impact

The Antari CO2 Series revolutionizes haze generation by utilizing CO2 for unparalleled consistency and efficiency. Designed for professional applications, it produces ultra-fine, long-lasting haze ideal for enhancing lighting effects in concerts, theaters, and live events.

Its CO2-driven technology ensures clean, residue-free haze while delivering exceptional coverage for both indoor and outdoor venues.

Durable, efficient, and precise, the Antari CO2 Series redefines haze generation for bold, unforgettable effects, empowering productions to achieve their boldest visual effects.

Built for reliability and performance.



CH-1



CONTROL METHODS



MANUAL



TIMER



5PIN/3PIN



W-DMX

OPTIONAL

RATED POWER

120V 6.0A 700W
240V 5.5A 1250W

INCLUDED ACCESSORIES

- › PRESSURE GAUGE
- › AIR HOSE


INPUT VOLTAGE

AC 100 - 240V, 50 / 60 HZ

FLUID CONSUMPTION

2 ML/MIN @40PSI / 2.76BAR (100% OUTPUT)

COMPATIBLE FLUID



› CHL-2

DIMENSION



L 579 MM
W 164 MM
H 311 MM

L 22.79 INCH
W 6.46 INCH
H 12.25 INCH

WEIGHT



17.0 KG
37.48 LBS



Neutrik
powerCON
TRUE 1
Connector Power

NOTE : CO2 CYLINDER IS NOT INCLUDED. PLEASE PURCHASE LOCALLY.

A scenic view of a canyon with a low-lying fog machine effect. The image shows a deep canyon with steep, layered rock walls. A thick, white fog or low-lying cloud fills the bottom of the canyon, creating a dramatic and ethereal atmosphere. The sky is a clear, deep blue. In the foreground, a dark, curved structure, possibly part of a stage or set, is visible on the right side, partially obscured by the fog.

LOW FOG MACHINE

The Antari DNG Series is your gateway to awe-inspiring low-lying cloud effects. These cuttingedge machines produce a dense, white fog that hugs the floor, creating an ethereal atmosphere that enchants and mystifies.

Engineered with precision, the DNG Series is equipped with advanced technology to deliver a crawler effect, mimicking natural ground-hugging fog. Perfect for theaters, stages, and special events, these fog generators offer unparalleled control and versatility. Transform any space into a mystical wonderland with ease.

Elevate your productions and immerse your audience in a world of enchantment with the Antari DNG Series, where fog becomes a breathtaking, floor-level spectacle.



DNG-250



CONTROL METHODS



MANUAL TIMER 5PIN/3PIN

OPTIONAL

N/A

RATED POWER

US MODEL : AC 100 – 120V, 50 / 60 Hz
EU MODEL : AC 220 – 240V, 50 / 60 Hz

INCLUDED ACCESSORIES

› CODNG0600 3 METER FOG
CONDUCTING HOSE

START CURRENT

› 120V 75.0A
› 240V 36.0A

RATED CURRENT

› 120V 16.1A
› 240V 7.3A

FOG POWER CONSUMPTION

› 120V / 1600W 13.5A
› 240V / 1600W 7.0A

FLUID CONSUMPTION

100 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



› FLL

DIMENSION



L 922 MM	L 36.30 INCH
W 609 MM	W 23.98 INCH
H 890 MM	H 35.04 INCH

WEIGHT



130.0 KG
286.60 LBS



Neutrik
powerCON
Connector (Power)



DNG-100

CONTROL METHODS



ON / OFF
SWITCH CONTROL

OPTIONAL

N/A

RATED VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz
EU MODEL : AC 220 – 240V, 50 / 60 Hz

INCLUDED ACCESSORIES

- › FTA-11 DIVERTER
- › FT-10 FOG CONDUCTING HOSE

START CURRENT

- › 120V 61.0A
- › 240V 21.0A

RATED CURRENT

- › 120V 6.7A
- › 240V 3.2A

RATED POWER

120V 750W
240V 600W

FLUID CONSUMPTION

N/A

COMPATIBLE FLUID



› N/A

DIMENSION



L 784 MM	L 30.86 INCH
W 608 MM	W 23.93 INCH
H 479 MM	H 18.85 INCH

WEIGHT



72.0 KG
158.73 LBS



ICE-101



CONTROL METHODS



MANUAL TIMER 3PIN

OPTIONAL

N/A

RATED POWER

1130W

INCLUDED ACCESSORIES

› Z-8 CABLE TIMER REMOTE

INPUT VOLTAGE

US MODEL : AC 100 ~ 120V, 50 / 60 Hz 9.5A

EU MODEL : AC 220 ~ 240V, 50 / 60 Hz 5.0A

FLUID CONSUMPTION

25 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



› FLC
› FLL
› FLR

DIMENSION



L 670 MM	L 26.38 INCH
W 355 MM	W 13.98 INCH
H 506 MM	H 19.93 INCH

WEIGHT



24.4 KG
53.79 LBS



IEC
Connector (Power)



SNOW MACHINE

The Art of Realistic Snowfall

Bring the magic of winter to any scene with Antari S Series Snow Machines — the professional choice for creating natural, fluffy snow effects. Designed for theatres, theme parks, film production, and live events, the S Series combines precision engineering with powerful performance, ensuring a consistent, quiet, and realistic snowfall every time.

Each model in the series is crafted to meet different application needs — from compact, portable units ideal for small stages to high-output machines capable of covering large outdoor areas. Built with durability, reliability, and easy control in mind, the S Series offers variable snow output, adjustable flake size, and DMX compatibility, giving users full creative control over the atmosphere they want to achieve.

Whether it's a gentle drift or a blizzard effect, Antari's S Series delivers a clean, residue-free snow that enhances any production with the beauty of winter — anytime, anywhere.



S-600



CONTROL METHODS



MANUAL



TIMER



5PIN



WIRELESS



W-DMX



CABLE

OPTIONAL

RATED POWER

1200W

INCLUDED ACCESSORIES

- › W-2 WIRELESS TRANSMITTER
- › 5-METER FLUID TUBE WITH FILTER

FLUID CONSUMPTION

400 ML/MIN (100% OUTPUT)

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 10.0A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 5.0A

COMPATIBLE FLUID



- › SL
- › SL-A
- › SL-N

- › SL-AN
- › SL-H
- › SL-C

DIMENSION



L 464 MM

W 624 MM

H 661 MM

L 18.27 INCH

W 24.57 INCH

H 26.03 INCH

WEIGHT



26.0 KG

57.32 LBS



Neutrik
powerCON
TRUE 1
Connector Power



S-500



CONTROL METHODS



MANUAL TIMER

5PIN/3PIN

OPTIONAL



WIRELESS

W-DMX

CABLE

RATED POWER

900W

INCLUDED ACCESSORIES

- › S-500: S-500-HOSE 10 METER STANDARD HOSE
- › S-500L: 500-HOSE 10 METER STANDARD HOSE
- + ST-10 10 METER EXTENSION HOSE

FLUID CONSUMPTION

400 ML/MIN (100% OUTPUT)

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 7.5A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 4.0A

COMPATIBLE FLUID



- › SL
- › SL-A
- › SL-N

- › SL-AN
- › SL-H
- › SL-C

- › SL-UV

DIMENSION



S-500	L	592	MM	L	23.31	INCH
	W	551	MM	W	21.69	INCH
	H	651	MM	H	25.63	INCH

S-500L	L	803	MM	L	31.61	INCH
	W	603	MM	W	23.74	INCH
	H	651	MM	H	25.63	INCH

WEIGHT



S-500
37.2 KG
82.01 LBS

S-500L
46.4 KG
102.29 LBS



Neutrik
powerCON
Connector (Power)



S-200X



CONTROL METHODS



MANUAL

3PIN

CABLE

OPTIONAL

N/A

RATED POWER

880W

INCLUDED ACCESSORIES

- › SC-2 CABLE REMOTE
- › HANGING BRACKET

FLUID CONSUMPTION

140 ML/MIN (100% OUTPUT)

INPUT VOLTAGE

US MODEL : AC 100 - 120V, 50 / 60 Hz 7.5A

EU MODEL : AC 220 - 240V, 50 / 60 Hz 4.0A

COMPATIBLE FLUID



- › SL
- › SL-AN
- › SL-UV
- › SL-A
- › SL-H
- › SL-N
- › SL-C

DIMENSION



L 505 MM	L 19.88 INCH
W 365 MM	W 14.37 INCH
H 409 MM	H 16.10 INCH

WEIGHT



11.5 KG
25.35 LBS



IEC
Connector (Power)



S-100X

CONTROL METHODS



MANUAL

3PIN

CABLE

OPTIONAL

N/A

RATED POWER

880W

INCLUDED ACCESSORIES

- › SC-2 CABLE REMOTE
- › HANGING BRACKET

FLUID CONSUMPTION

160 ML/MIN (100% OUTPUT)

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 7.5A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 4.0A

COMPATIBLE FLUID



- › SL
- › SL-AN
- › SL-UV
- › SL-A
- › SL-H
- › SL-N
- › SL-C

DIMENSION



L	505	MM	L	19.88	INCH
W	365	MM	W	14.37	INCH
H	409	MM	H	16.10	INCH

WEIGHT



11.0 KG
24.25 LBS



IEC
Connector (Power)



SW-300



CONTROL METHODS



MANUAL



TIMER



5PIN



WIRELESS



CABLE

OPTIONAL

RATED POWER

880W

INCLUDED ACCESSORIES

- › W-1 WIRELESS TRANSMITTER
- › HANGING BRACKET

FLUID CONSUMPTION

280 ML/MIN (100% OUTPUT)

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 7.5A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 4.0A

COMPATIBLE FLUID



- › SL
- › SL-A
- › SL-N
- › SL-AN
- › SL-H
- › SL-C
- › SL-UV

DIMENSION



L 513 MM	L 20.20 INCH
W 376 MM	W 14.81 INCH
H 349 MM	H 13.74 INCH

WEIGHT



11.5 KG
25.35 LBS



IEC
Connector (Power)



SW-250

CONTROL METHODS



MANUAL TIMER 512 WIRELESS

OPTIONAL



CABLE

RATED POWER

900W

INCLUDED ACCESSORIES

- › W-1 WIRELESS TRANSMITTER
- › HANGING BRACKET

FLUID CONSUMPTION

140 ML/MIN (100% OUTPUT)

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 8.0A
EU MODEL : AC 220 – 240V, 50 / 60 Hz 4.0A

COMPATIBLE FLUID

- | | | | |
|--|--------|---------|---------|
| | › SL | › SL-AN | › SL-UV |
| | › SL-A | › SL-H | |
| | › SL-N | › SL-C | |

DIMENSION

	L	539	MM	L	21.22	INCH
	W	365	MM	W	14.37	INCH
	H	409	MM	H	16.10	INCH

WEIGHT

11.5 KG
25.35 LBS



IEC
Connector (Power)



Where Bubble Magic Meets Endless Fun!

The Antari B Series is the epitome of bubble special effects, transforming any event into a mesmerizing spectacle. These professional-grade bubble machines deliver enchanting, glistening bubbles that captivate audiences of all ages.

Crafted with precision and reliability, the B Series offers a range of models to suit any occasion, from intimate gatherings to grand stages. With whisper-quiet operation and adjustable output, you can create the perfect ambiance effortlessly.

Designed for ease of use, they effortlessly integrate into your setup. Elevate your events, productions, and parties with the Antari B Series, where bubbles become magical moments that leave lasting memories.



W-101

CONTROL METHODS



MANUAL WIRELESS

OPTIONAL

N/A

RATED POWER

120V 32W
240V 32W

INCLUDED ACCESSORIES

- › W-1 WIRELESS TRANSMITTER
- › HANGING BRACKET

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 0.5A
EU MODEL : AC 220 – 240V, 50 / 60 Hz 0.5A

FLUID CONSUMPTION

8.3 ML/MIN(100% OUTPUT)

COMPATIBLE FLUID



› BL

DIMENSION



L 350 MM	L 13.78 INCH
W 264 MM	W 10.40 INCH
H 290 MM	H 11.42 INCH

WEIGHT



4.8 KG
10.58 LBS



B-200

CONTROL METHODS



MANUAL 5PIN

OPTIONAL



TIMER WIRELESS CABLE

RATED POWER

120W

INCLUDED ACCESSORIES

> HANGING BRACKET

INPUT VOLTAGE


US MODEL : AC 100 – 120V, 50 / 60 Hz 1.0A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 0.5A

FLUID CONSUMPTION

50 ML/MIN (100% OUTPUT)

COMPATIBLE FLUID



> BL

DIMENSION



L 508 MM	L 20.00 INCH
W 251 MM	W 9.89 INCH
H 391 MM	H 15.40 INCH

WEIGHT



11.0 KG
24.25 LBS



IEC
Connector (Power)



B-100

CONTROL METHODS



MANUAL

OPTIONAL

N/A

RATED POWER

120V 30W
240V 32W

INCLUDED ACCESSORIES

› HANGING BRACKET

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 0.5A
EU MODEL : AC 220 – 240V, 50 / 60 Hz 0.5A

FLUID CONSUMPTION

8.3 ML/MIN(100% OUTPUT)

COMPATIBLE FLUID



› BL

DIMENSION



L 341 MM	L 13.43 INCH
W 265 MM	W 10.44 INCH
H 290 MM	H 11.42 INCH

WEIGHT



4.2 KG
9.26 LBS



More Than a Fan – Blow Away Expectations!

Precision Airflow for Perfect Effects

The Antari AF Series represents the next generation of professional special effects fans, engineered to deliver powerful, consistent, and controllable airflow for a wide range of stage and event applications. Designed with precision and reliability at its core, the AF Series ensures effects travel farther, disperse evenly, and fill the space exactly as intended.

Every model in the series is built to meet the demands of professionals — featuring durable construction, adjustable speed control, and DMX compatibility for seamless integration into any production setup. From compact units perfect for studios and theaters to high-performance, IP-rated models built to withstand outdoor environments, the AF Series delivers exceptional versatility and endurance.

Wherever precise airflow matters — on stage, on set, or on tour — the Antari AF Series provides the power and performance to bring your creative vision to life.



AF-6

CONTROL METHODS



MANUAL TIMER 5PIN

OPTIONAL



WIRELESS CABLE

RATED POWER

250W

INCLUDED ACCESSORIES

N/A

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 2.5A


EU MODEL : AC 220 – 240V, 50 / 60 Hz 1.5A

DIMENSION



L 461 MM	L 18.20 INCH
W 623 MM	W 24.53 INCH
H 614 MM	H 24.17 INCH

WEIGHT



24.1 KG
53.13 LBS



Neutrik
powerCON
TRUE 1
Connector Power



AF-3



CONTROL METHODS



MANUAL 5PIN

OPTIONAL



WIRELESS CABLE

RATED POWER

127W

INCLUDED ACCESSORIES

N/A

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz 1.5A

EU MODEL : AC 220 – 240V, 50 / 60 Hz 1.0A

DIMENSION



AF-3 / AF-3X

L 124 MM

W 320 MM

H 371 MM

L 4.88 INCH

W 12.59 INCH

H 14.61 INCH

AF-3S

L 160 MM

W 312 MM

H 337 MM

L 6.29 INCH

W 12.28 INCH

H 13.27 INCH

WEIGHT



AF-3 / AF-3X

6.0 KG

13.23 LBS

AF-3S

6.4 KG

14 LBS



Neutrik
powerCON
Connector (Power)

Professional Scent Solutions for Every Space

The Antari SCN Series redefines ambiance by delivering immersive aromatic experiences for professional, commercial, and residential environments. Designed for versatility, it ensures consistent and even diffusion, enhancing atmospheres in any environment. With sleek, modern aesthetics and whisper-quiet performance, the SCN Series seamlessly integrates into any setting while offering customizable intensity levels to suit diverse needs. Built for durability and efficiency, the SCN Series offers a perfect blend of functionality and sophistication, redefining how spaces connect with their audiences.

ESS-01-CFE : Whisper Forest

Blend of Essential Oils:

Top Notes: Pink Grapefruit, Juniper Berry

Middle Notes: Bourbon Geranium, Lavender

Base Notes: Patchouli

ESS-01-CFW : Tropical Breeze

Blend of Essential Oils:

Top Notes: Sweet Orange, Lemongrass, Lime

Middle Notes: Eucalyptus, Lavender, Citronella

Base Notes: Cypress(Hinoki)

ESS-01-CW : Citrus Veil

Blend of Essential Oils:

Top Notes: Pink Grapefruit, Lime

Middle Notes: Camphor

Base Notes: Rosewood

ESS-01-W : Jade Pines

Blend of Essential Oils:

Juniperus squamata var. morrisonicola/ Chamaecyparis formosensis(Hinoki)



ESS-01-CFE

125 ml



ESS-01-CW

125 ml



ESS-01-W

125 ml



ESS-01-CFW

125 ml



SCENT

SCN-600



CONTROL METHODS



MANUAL TIMER 5PIN

OPTIONAL

N/A

RATED POWER

7W

INCLUDED ACCESSORIES

N/A

INPUT VOLTAGE

AC 100-240V, 50 / 60 Hz 0.5A

FLUID CONSUMPTION

1 ML/HOUR (100% OUTPUT)

COMPATIBLE FLUID



- › ESS-01-CFE
- › ESS-01-CW
- › ESS-01-W
- › ESS-01-CFW

DIMENSION



L 267 MM	L 10.50 INCH
W 115 MM	W 4.52 INCH
H 222 MM	H 8.74 INCH


WEIGHT



3.2KG
7.05 LBS



IEC
Connector (Power)

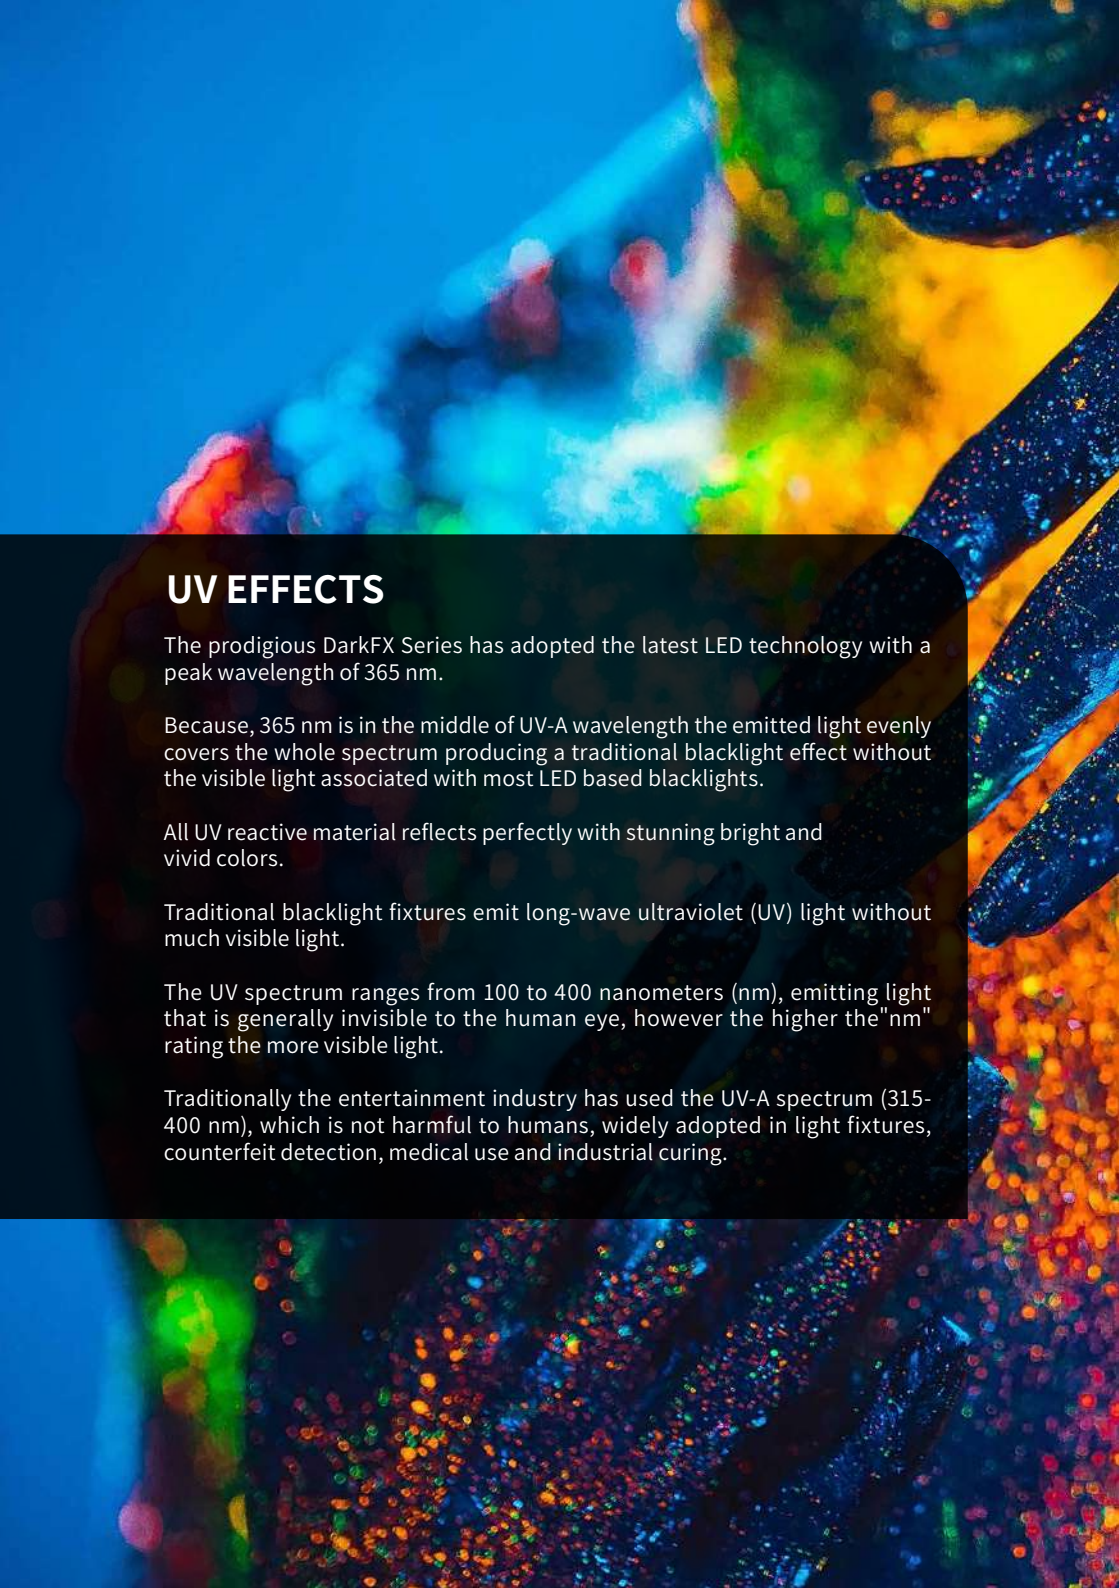

UV EFFECTS

The prodigious DarkFX Series has adopted the latest LED technology with a peak wavelength of 365 nm.

Because, 365 nm is in the middle of UV-A wavelength the emitted light evenly covers the whole spectrum producing a traditional blacklight effect without the visible light associated with most LED based blacklights.

All UV reactive material reflects perfectly with stunning bright and vivid colors.

Traditional blacklight fixtures emit long-wave ultraviolet (UV) light without much visible light.

The UV spectrum ranges from 100 to 400 nanometers (nm), emitting light that is generally invisible to the human eye, however the higher the "nm" rating the more visible light.

Traditionally the entertainment industry has used the UV-A spectrum (315-400 nm), which is not harmful to humans, widely adopted in light fixtures, counterfeit detection, medical use and industrial curing.




DARKFX STRIP 1020



FEATURES

- › HIGH EFFICIENCY UV LED
- › PEAK WAVELENGTH AT 365 nm
- › MINIMUM VISIBLE LIGHT
- › HIGH OUTPUT 9000 mW AT FULL INTENSITY
- › SPECIAL OPTICS WILL NOT DEGRADE BY HIGH UV EXPOSURE
- › FLICKER FREE

SPECTRUM

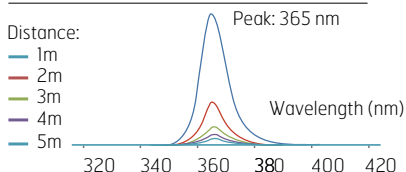

SPECIFICATION

- › INPUT VOLTAGE DC 48V @ 0.5A
- › RATED POWER 24W
- › LIGHT SOURCE 12 X 1.9W HIGH POWER UV LED
- › OPTICS 40 DEGREES
- › RADIANT FLUX OUTPUT 9000 mW
- › PROJECT LAMP LIFE 20,000 HRS L70 AT 25°C
- › PEAK WAVELENGTH 365 nm
- › AMBIENT TEMP. RANGE 0°C - 40°C (32°F - 104°F)
- › CABLE CONNECTION 22 AWG WIRE CABLE
- › HOUSING ALUMINUM EXTRUSION
- › PROTECTION RATING IP-20 INDOOR USE ONLY
- › DIMENSION L 1194 W 46 H 101 MM
L 47.00 W 1.82 H 3.98 INCH
- › DRY WEIGHT 1.9 KG
4.18 LBS

ILLUMINANCE MEASUREMENT

Distance (m)	1	2	3	4	5
Intensity	450($\mu\text{W}/\text{cm}^2$) 4.50(W/m^2)	158($\mu\text{W}/\text{cm}^2$) 1.58(W/m^2)	79($\mu\text{W}/\text{cm}^2$) 0.79(W/m^2)	42($\mu\text{W}/\text{cm}^2$) 0.42(W/m^2)	31($\mu\text{W}/\text{cm}^2$) 0.31(W/m^2)
Intensity degradation rate (compare with 1m)	0%	64.9%	82.5%	90.7%	93.0%




DARKFX STRIP 510 IP



FEATURES

- › HIGH EFFICIENCY UV LED
- › PEAK WAVELENGTH AT 365 nm
- › MINIMUM VISIBLE LIGHT
- › HIGH OUTPUT 4500 mW AT FULL INTENSITY
- › SPECIAL OPTICS WILL NOT DEGRADE BY HIGH UV EXPOSURE
- › FLICKER FREE

SPECTRUM

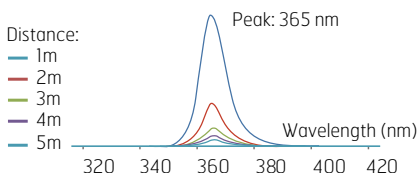

SPECIFICATION

- › INPUT VOLTAGE DC 20 - 24V
- › RATED POWER 12W
- › LIGHT SOURCE 6 X 1.9W HIGH POWER UV LED
- › OPTICS 25 DEGREES
- › RADIANT FLUX OUTPUT 4500 mW
- › PROJECT LAMP LIFE 20,000 HRS L70 AT 25°C
- › PEAK WAVELENGTH 365 nm
- › AMBIENT TEMP. RANGE 0°C - 40°C (32°F - 104°F)
- › CABLE CONNECTION 22 AWG WIRE CABLE
- › HOUSING ALUMINUM EXTRUSION
- › PROTECTION RATING IP-65
- › DIMENSION L 606 W55 H100 MM
L23.86 W 2.17 H3.94 INCH
- › DRY WEIGHT 1.1 KG
2.42 LBS

ILLUMINANCE MEASUREMENT

Distance (m)	1	2	3	4	5
Intensity	700($\mu\text{W}/\text{cm}^2$) 7.00(W/m^2)	211($\mu\text{W}/\text{cm}^2$) 2.11(W/m^2)	99($\mu\text{W}/\text{cm}^2$) 0.99(W/m^2)	54($\mu\text{W}/\text{cm}^2$) 0.54(W/m^2)	38($\mu\text{W}/\text{cm}^2$) 0.38(W/m^2)
Intensity degradation rate (compare with 1m)	0%	69.8%	85.9%	92.2%	94.5%




DARKFX STRIP 510



FEATURES

- › HIGH EFFICIENCY UV LED
- › PEAK WAVELENGTH AT 365 nm
- › MINIMUM VISIBLE LIGHT
- › HIGH OUTPUT 4500 mW AT FULL INTENSITY
- › SPECIAL OPTICS WILL NOT DEGRADE BY HIGH UV EXPOSURE
- › FLICKER FREE

SPECTRUM

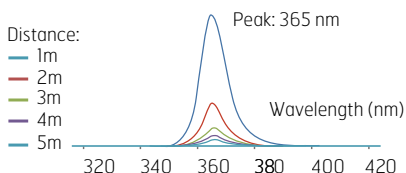

SPECIFICATION

- › INPUT VOLTAGE DC 20 - 24V
- › RATED POWER 12W
- › LIGHT SOURCE 6 X 1.9W HIGH POWER UV LED
- › OPTICS 25 DEGREES
- › RADIANT FLUX OUTPUT 4500 mW
- › PROJECT LAMP LIFE 20,000 HRS L70 AT 25°C
- › PEAK WAVELENGTH 365 nm
- › AMBIENT TEMP. RANGE 0°C - 40°C (32°F - 104°F)
- › CABLE CONNECTION 22 AWG WIRE CABLE
- › HOUSING ALUMINUM EXTRUSION
- › PROTECTION RATING IP-20 INDOOR USE ONLY
- › DIMENSION L 594 X W 46 X H 101 MM
L 23.39 X W 1.82 X H 3.98 INCH
- › DRY WEIGHT 1.9 KG
4.18 LBS

ILLUMINANCE MEASUREMENT

Distance (m)	1	2	3	4	5
Intensity	700($\mu\text{W}/\text{cm}^2$) 7.00(W/m^2)	211($\mu\text{W}/\text{cm}^2$) 2.11(W/m^2)	99($\mu\text{W}/\text{cm}^2$) 0.99(W/m^2)	54($\mu\text{W}/\text{cm}^2$) 0.54(W/m^2)	38($\mu\text{W}/\text{cm}^2$) 0.38(W/m^2)
Intensity degradation rate (compare with 1m)	0%	69.8%	85.9%	92.2%	94.5%




DARKFX WASH 2000 IP



FEATURES

- › HIGH EFFICIENCY UV LED
- › PEAK WAVELENGTH AT 365 nm
- › SPECIAL OPTICS WILL NOT DEGRADE TO HIGH UV EXPOSURE
- › MINIMUM VISIBLE LIGHT
- › HIGH OUTPUT 24800 mW AT FULL INTENSITY
- › FLICKER FREE

SPECTRUM

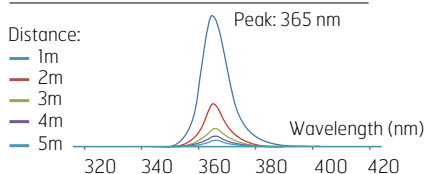

ILLUMINANCE MEASUREMENT

Distance (m)	1	2	3	4	5
Intensity	5462($\mu\text{W}/\text{cm}^2$) 54.62(W/m^2)	1572($\mu\text{W}/\text{cm}^2$) 15.72(W/m^2)	718($\mu\text{W}/\text{cm}^2$) 7.18(W/m^2)	409($\mu\text{W}/\text{cm}^2$) 4.09(W/m^2)	251($\mu\text{W}/\text{cm}^2$) 2.51(W/m^2)
Intensity degradation rate (compare with 1m)	0%	71.2%	86.8%	92.5%	95.4%

SPECIFICATION

- › INPUT VOLTAGE AC 100 - 240V, 50 / 60 Hz
- › RATED POWER 70W
- › LIGHT SOURCE 33 X 1.9W HIGH POWER UV LED
- › REFRESH RATE 500 Hz
- › OPTICS 25 DEGREES
- › RADIANT FLUX OUTPUT 24800 mW
- › LIFE SPAN 20,000 HRS L70 AT 25°C
- › PEAK WAVELENGTH 365 nm
- › AMBIENT TEMP. RANGE 0°C - 40°C (32°F - 104°F)
- › CONTROL MANUAL, DMX512
- › DMX CHANNELS 2 CHANNEL
- › CONNECTION NEUTRIK POWERCON (POWER) XLR-5 PIN (DMX)
- › HOUSING ALUMINUM DIE-COST
- › PROTECTION RATING IP-65
- › DIMENSION L 454 W 116 H 331 MM
L17.87 W 4.56 H 3.03 INCH
- › DRY WEIGHT 10.4 KG
22.92 LBS




DARKFX WASH 2000



FEATURES

- › HIGH EFFICIENCY UV LED
- › PEAK WAVELENGTH AT 365 nm
- › MINIMUM VISIBLE LIGHT
- › HIGH OUTPUT 20290 mW AT FULL INTENSITY
- › SPECIAL OPTICS WILL NOT DEGRADE BY HIGH UV EXPOSURE
- › FLICKER FREE
- › ADJUSTABLE MODULARSTRIPS TO MAXIMIZE COVEROG

SPECTRUM

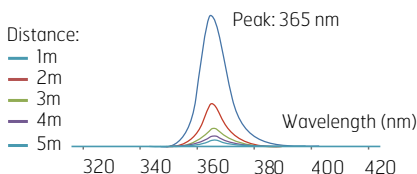

SPECIFICATION

- › INPUT VOLTAGE AC 100 - 240V, 50 / 60 Hz
- › RATED POWER 55W
- › LIGHT SOURCE 27 X 1.9W HIGH POWER UV LED
- › REFRESH RATE 500 Hz
- › OPTICS 25 DEGREES
- › RADIANT FLUX OUTPUT 20290 mW
- › LIGE SPAN 20,000 HRS L70 AT 25°C
- › PEAK WAVELENGTH 365 nm
- › AMBIENT TEMP. RANGE 0°C - 40°C (32°F - 104°F)
- › CONTROL MANUAL, DMX512
- › DMX CHANNELS 2 CHANNEL
- › CONNECTION NEUTRIK POWERCON (POWER) XLR-5 PIN (DMX)
- › HOUSING METAL
- › PROTECTION RATING IP-20 INDOOR USE ONLY
- › DIMENSION L 600 W 182 H 182 MM
L 23.62 W 7.17 H 7.17 INCH
- › DRY WEIGHT 6.4 KG
14.10 LBS

ILLUMINANCE MEASUREMENT

Distance (m)	1	2	3	4	5
Intensity	4184($\mu\text{W}/\text{cm}^2$) 41.84(W/m^2)	1737($\mu\text{W}/\text{cm}^2$) 17.37(W/m^2)	933($\mu\text{W}/\text{cm}^2$) 9.33(W/m^2)	648($\mu\text{W}/\text{cm}^2$) 6.48(W/m^2)	526($\mu\text{W}/\text{cm}^2$) 5.26(W/m^2)
Intensity degradation rate (compare with 1m)	0%	66.3%	83.8%	87.7%	90.9%




DARKFX SPOT 510 IP



FEATURES

- › HIGH EFFICIENCY UV LED
- › PEAK WAVELENGTH AT 365 nm
- › MINIMUM VISIBLE LIGHT
- › HIGH OUTPUT 4500 mW AT FULL INTENSITY
- › SPECIAL OPTICS WILL NOT DEGRADE BY HIGH UV EXPOSURE
- › FLICKER FREE

SPECTRUM

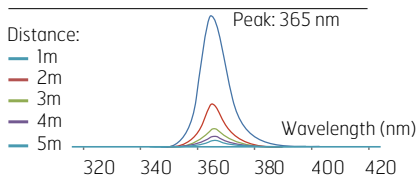

SPECIFICATION

- › INPUT VOLTAGE DC 20 - 24V
- › RATED POWER 12W
- › LIGHT SOURCE 6 X 1.9W HIGH POWER UV LED
- › OPTICS 15 DEGREES
- › RADIANT FLUX OUTPUT 4500 mW
- › LIFE SPAN 20,000 HRS L70 AT 25°C
- › PEAK WAVELENGTH 365 nm
- › AMBIENT TEMP. RANGE 0°C - 40°C (32°F - 104°F)
- › COBLE CONNECTION 22 AWG WIRE CABLE
- › HOUSING ALUMINUM EXTRUSION
- › PROTECTION RATING IP-65
- › DIMENSION L 119 W 66 H 135 MM
L 4.69 W 2.60 H 5.32 INCH
- › DRY WEIGHT 0.8 KG
1.76 LBS

ILLUMINANCE MEASUREMENT

Distance (m)	1	2	3	4	5
Intensity	2062($\mu\text{W}/\text{cm}^2$) 20.62(W/m^2)	534($\mu\text{W}/\text{cm}^2$) 5.34(W/m^2)	213($\mu\text{W}/\text{cm}^2$) 2.13(W/m^2)	126($\mu\text{W}/\text{cm}^2$) 1.26(W/m^2)	76($\mu\text{W}/\text{cm}^2$) 0.76(W/m^2)
Intensity degradation rate (compare with 1m)	0%	74.1%	89.6%	93.9%	96.3%




DARKFX DRIVE 4 MKII



FEATURES

- › COMPACT AND ROBUST DESIGN
- › 4 OUTPUT TERMINALS FOR DARKFX UV FIXTURES
- › NEUTRIK POWERCON IN/ THRU
- › 2 X 16 DIGIT LCD DISPLAY INTERFACE
- › DMX CONTROL OPTION
- › RDM FEATURE SET

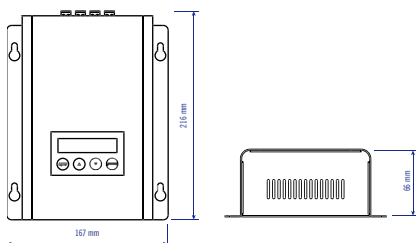

SPECIFICATION

- | | |
|-----------------------|--|
| › INPUT VOLTAGE | AC 100 - 240V, 50 / 60 Hz |
| › RATED POWER | 100W |
| › OUTPUT CURRENT | DC12-48V CONSTANT 500MA
MAX. PER CHANNEL |
| › REFRESH RATE | 600 Hz |
| › AMBIENT TEMP. RANGE | 0°C - 40°C (32°F - 104°F) |
| › FIXTURE OUTPUT | 4 TERMINAL BLOCK |
| › CONTROL | MANUAL
DMX 512 |
| › DMX CHANNELS | 2 CHANNEL |
| › CONNECTION | NEUTRIK POWERCON (POWER)
XLR 5-PIN (DMX) |
| › HOUSING | METAL |
| › PROTECTION RATING | IP-20 LNDOR USE ONLY |
| › DIMENSION | L 216 W 167 H 71 MM
L 8.50 W 6.58 H 2.80 INCH |
| › WEIGHT | 1.62KG
3.58 LBS |

ACCESSORIES



AFC-1



CONTROL METHODS



MANUAL TIMER 5PIN

OPTIONAL



WIRELESS W-DMX

RATED POWER

120V 300W
240V 300W

INCLUDED ACCESSORIES

N/A

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60 Hz2.5A
EU MODEL : AC 220 – 240V, 50 / 60 Hz1.5A

DIMENSION

	L	229 MM	L	9.02 INCH
	W	196 MM	W	7.72 INCH
	H	53 MM	H	2.09 INCH

WEIGHT



SEETRONIC IP65
Connector (Power)



LCU-2S

CONTROL METHODS



AUTO

OPTIONAL

N/A

RATED POWER

55W

INCLUDED ACCESSORIES

- › XLR 3-PIN DATA CABLE
- › FT-6 12 METER 6MM X 4MM TUBE
- › FT-4 10 METER 4MM X 2.5MM TUBE
- › FTA-44 ADAPTER 4 TO 4MM ADAPTOR *3
- › FTA-64 6 TO 4MM ADAPTOR *3
- › FLF-6 FLUID FILTER

US MODEL : AC 100 – 120V, 50 / 60 Hz 0.5A
EU MODEL : AC 220 – 240V, 50 / 60 Hz 0.5A

COMPATIBLE FLUID



› ANTARI FLUID

DIMENSION



SUPPLY UNIT

L 179 MM	L 7.05 INCH
W 168 MM	W 6.62 INCH
H 84 MM	H 3.31 INCH

TANK UNIT

L 158 MM	L 6.22 INCH
W 103 MM	W 4.06 INCH
H 312 MM	H 12.29 INCH

WEIGHT



SUPPLY UNIT

2.0 KG
4.40 LBS

TANK UNIT

1.8 KG
3.97 LBS



IEC
Connector (Power)



LCU-1S



CONTROL METHODS



MANUAL TIMER 3PIN

OPTIONAL

N/A

N/A

RATED POWER

40W

INCLUDED ACCESSORIES

- › XLR 4-PIN DATA CABLE
- › 10M 6MM X 4MM FLUID TUBE
- › FTA-64 ADAPTER (6MM TO 4MM)
- › FLF-6 FLUID FILTER

INPUT VOLTAGE

US MODEL : AC 100 – 120V, 50 / 60Hz 0.5A
EU MODEL : AC 220 – 240V, 50 / 60Hz 0.5A

COMPATIBLE FLUID



› ANTARI FLUID

DIMENSION



L	203 MM	L	7.99 INCH
W	179 MM	W	7.05 INCH
H	96 MM	H	3.78 INCH

WEIGHT



3.3 KG
7.28 LBS



IEC
Connector (Power)

CONTROL MODULE

FREQUENCY : 315 MHz & 433 MHz

WORKING DISTANCE : UP TO 50 M (164 FT)



W-1

COMPATIBLE WITH:

AF-3R, AF-3XR, F-1, HZ-350, SW-300, SW-250,
W-508



W-2

COMPATIBLE WITH:

AF-6, F-6, F-7X, F-12, IP-1600, IP-3000, M-7X,
M-9, M-12, MB-20X, S-500, S-600, Z-390,
Z-1520, Z-1500III, Z-3000III

EASY SWITCH RECEIVER



ES-W2-RECEIVER



W-1 RECEIVER



TIMO-W-DMXW1R



TIMO-W-DMX-PCB



ES-W-DMX



W-2 RECEIVER



TIMO-W-DMXW2R



TIMO-W-DMXR



WIRELESS WORKING DISTANCE MAY VARY
DEPENDING ON THE INTERFERENCE



WTR-110

- › W-2 TRANSMITTER
- › ES-W-2 RECEIVER



TIMO-WTR-90

- › TIMO-W-DMX-PCB
- › TIMO-W-DMXW2R



TIMO-WTR-80

- › W-2 TRANSMITTER
- › TIMO-W-DMXW2R



TIMO-WTR-70

- › W-2 TRANSMITTER
- › TIMO-W-DMXW2R
- › TIMO-W-DMX-PCB



TIMO-WTR-60

- › TIMO-W-DMX-PCB
- › TIMO-W-DMXW1R



TIMO-WTR-50

- › W-1 TRANSMITTER
- › TIMO-W-DMXW1R



TIMO-WTR-40

- › W-1 TRANSMITTER
- › TIMO-W-DMXW1R
- › TIMO-W-DMX-PCB



WTR-20

- › W-2 TRANSMITTER
- › W-2 RECEIVER



WTR-10

- › W-1 TRANSMITTER
- › W-1 RECEIVER



TIMO-W-DMX-PCBR

- › TIMO-W-DMX-PCB
- › TIMO-W-DMXR

WTR-10	WTR-20	TIMO-WTR-40_50_60	TIMO-WTR-70_80	TIMO-WTR-90	WTR-110	TIMO-W-DMX-PCBR
AF-3, F-1, SW-250X	AF-6, MB-20X, S-500(L), Z-390, Z-1500III, Z-3000III	F-1	S-500(L)	M-7X, M-9, S-500(L), S-600	F-6, F-7X, F-8, F-12, J-100, DNG-50, AFC-1, M-12	CH-1, F-1, HZ-1000, S-500(L)

1



2



3



4



5



6



7



8



9



10



M-20

1

- COMPATIBLE MODEL : M-5, M-10
- CABLE LENGTH : 2M
- CONNECTOR : 5 PIN XLR

M-21

2

- COMPATIBLE MODEL : M-8
- CABLE LENGTH : 2M
- CONNECTOR : 5 PIN XLR

M-30 PRO

3

- COMPATIBLE MODEL : M-5, M-10
- WORKING DISTANCE : UP TO 50 M
- CONNECTOR : 5 PIN XLR

M-31

4

- COMPATIBLE MODEL : M-8
- WORKING DISTANCE : UP TO 50 M
- CONNECTOR : 5 PIN XLR

Z-3 CABLE REMOTE

5

- COMPATIBLE MODEL : AF-3, MB-20X, Z-350,
- Z-390, Z-1200III
- CABLE LENGTH : 9 FT
- CONNECTOR : 1/4 STEREO

Z-8 TIMER REMOTE

6

- COMPATIBLE MODEL : ICE-101, LCU-1S
- CABLE LENGTH : 25 FT
- CONNECTOR : 4 PIN XLR

Z-10 CABLE REMOTE

7

- COMPATIBLE MODEL : Z-800III, Z-1000III
- WORKING DISTANCE : 25 FT
- CONNECTOR : 1/4 STEREO

Z-40 TIMER REMOTE

8

- COMPATIBLE MODEL : Z-800III, Z-1000III, Z-1200III
- CABLE LENGTH : 25 FT
- CONNECTOR : 1/4 STEREO

Z-50 WIRELESS REMOTE

9

- COMPATIBLE MODEL : Z-800III, Z-1000III, Z-1200III
- WORKING DISTANCE : UP TO 50 M
- CONNECTOR : 1/4 STEREO

BCR-1 WIRELESS REMOTE

10

- COMPATIBLE MODEL : B-200
- WORKING DISTANCE : UP TO 50 M
- CONNECTOR : 1/4 STEREO

11



12



BCT-1 TIMER REMOTE

11

- COMPATIBLE MODEL : B-200
- CABLE LENGTH : 25FT
- CONNECTOR : 1/4 STEREO

HC-1 TIMER REMOTE

12

- COMPATIBLE MODEL : HZ-100, HZ-350, HZ-400
- CABLE LENGTH : 25 FT
- CONNECTOR : 1/4 STEREO

13



14



HCR-1 WIRELESS REMOTE

13

- COMPATIBLE MODEL : HZ-100, HZ-400
- WORKING DISTANCE : UP TO 50 M
- CONNECTOR : 1/4 STEREO

MCR-1F WIRELESS REMOTE

14

- COMPATIBLE MODEL : MB-1
- WORKING DISTANCE : UP TO 50 M
- CONNECTOR : 4 PIN DIN

MCT-2 TIMER REMOTE

15

- COMPATIBLE MODEL : MB-1
- CABLE LENGTH : 25FT
- CONNECTOR : 4 PIN DIN

15



16



SC-2 CABLE REMOTE

16

- COMPATIBLE MODEL : AF-6, LCU-1S, S-100X, S-200X, SW-250(X)
- CABLE LENGTH : 25 FT
- CONNECTOR : 4 PIN XLR

SC-3 CABLE REMOTE

17

- COMPATIBLE MODEL : SW-300, S-500(L)
- CABLE LENGTH : 25 FT
- CONNECTOR : 4 PIN XLR

17



18



SC-4 CABLE REMOTE

18

- COMPATIBLE MODEL : S-600
- CABLE LENGTH : 25 FT
- CONNECTOR : 6 PIN XLR



WIRELESS WORKING DISTANCE MAY VARY
DEPENDING ON THE INTERFERENCE

FLUID TUBE & FILTER



FT-4
4MM FLUID TUBE



FT-6
6MM FLUID TUBE



FLF-4
FLUID FILTER
FOR 4MM TUBE



FLF-6
FLUID FILTER
FOR 6MM TUBE



FTA-64
ADAPTOR FOR 4MM TO 6MM TUBE
CONNECTION



FTA-66
ADAPTOR FOR 6MM TO 6MM TUBE
CONNECTION



FTA-664
ADAPTOR FOR TWO 6MM TUBES TO
ONE 4MM TUBE CONNECTION




FTA-44
ADAPTOR FOR 4MM TO 4MM TUBE
CONNECTION

HANGING BRACKET SET



M-9-HB
ONE M-9 REQUIRES
2 PCS M-9-HB



M-5-HB
M-5, M-8



SW-300FB
FLOOR BRACKET
S-100X, S-200X, SW-250(X), SW-300



M-12-HB
M-12

REMOTE CONTROL EXTENSION CABLES



EXT-1
25 FT. EXTENSION CABLE WITH
1/4 STEREO PLUG



EXT-5
25 FT. EXTENSION CABLE
WITH 5-PIN XLR CONNECTORS



EXT-3
25 FT. EXTENSION CABLE
WITH 5-PIN XLR CONNECTORS

EXT-4

25 FT. EXTENSION CABLE
WITH 3-PIN XLR CONNECTORS

EXT-6

25 FT. EXTENSION CABLE
WITH 4-PIN XLR CONNECTORS

ADAPTORS



FTA-1

①

ADAPTOR FOR CONNECTING FOG CONDUCTING HOSE FT-10 TO IP-1600, IP-3000, M-5, M-8, M-10, Z-1500III & Z-3000III FOG MACHINES, IN ORDER TO ACHIEVE STRATEGIC FOG PLACEMENT.

FTA-2A

②

THE SAME FUNCTION AS THE FTA-1, SPECIFICALLY DESIGNED FOR Z-1000III & Z-1200III FOG MACHINE.

FTA-200

③

FOG CONDUCTING HOSE ADAPTOR FOR AND DNG-250. THE HOSE ADAPTOR CAN BE INSTALLED ON IT AND THIS CAN SPLIT LOG FOG OUTPUT INTO TWO.

FTA-11

④

FOG CONDUCTING HOSE ADAPTOR FOR AND DNG-100. THE HOSE ADAPTOR CAN BE INSTALLED ON IT AND THIS CAN SPLIT LOG FOG OUTPUT INTO TWO.

FTA-13

⑤

EXPANDS AND SMOOTHS THE FOG OUT FOR WIDER COVERAGE.

COMPATIBLE WITH : DNG-50 AND DNG-250

FT-10

⑥

FOG CONDUCTING HOSE FOR DNG-100 WITH 12 CM DIAMETER AND 10 METERS IN LENGTH

FLIGHT CASE



FCH-1

①

- DIMENSIONS : L900 W 574 H 938 MM
- WEIGHT : 51.6 KG
- COMPATIBLE WITH : CH-1

FDNG-250

②

- DIMENSIONS : L865 W 695 H 1020 MM
- WEIGHT : 46.5 KG
- COMPATIBLE WITH : DNG-250

FZ-350

③

- DIMENSIONS : L429 W 230 H 478 MM
- WEIGHT : 8.9 KG
- COMPATIBLE WITH : Z-350

FX-4

④

- DIMENSIONS : L495 W 418 H 500 MM
- WEIGHT : 12.3 KG
- COMPATIBLE WITH : Z-1520, Z-350
- TWO UNIT IN THE CASE

FX-6

⑤

- DIMENSIONS : L730 W 453 H 425 MM
- WEIGHT : 12.3 KG
- COMPATIBLE WITH : F-1, S-100X, S-200X, SW-250(X), SW-300

FLUID

Welcome to the Antari Fluid Page. Your gateway to premium atmospheric effects, our Fog Fluid, formulated with Propylene Glycol aka PG, guarantees a safe and mesmerizing fog.

Antari Snow Fluid transforms your surroundings into a winter wonderland, while Bubble Fluid adds a playful touch to any event.

Crafted from pharmaceutical-grade raw materials, our fluids ensure the highest quality and performance.

Versatile and compatible with all Antari machines, these fluids promise a seamless and exceptional experience.

Explore the pages to discover how Antari sets the standard for excellence in fluid technology, enhancing your events with captivating and reliable special effects.



FLK

Experience next-level fog performance with Antari FLK Fog Fluid, a new-generation formula designed for the J-100 SonicJet and DNG-50 Low Fog Machine.

Developed through extensive field testing, FLK delivers optimized density, hang time, and dispersion, ensuring maximum visual impact whether you're creating powerful jet bursts or dense, ground-hugging effects.

Unlock the full potential of your J-100 and DNG-50 — with Antari FLK, fog has never looked this precise.

FOG FLUID



FLG



FLH



FLJ



FLR



FLUID



FLY



FLZ



FLL LOW FOG FLUID

FOR ICE-101 / DNG-250 / DNG-50 USE ONLY



FLC JET FOG FLUID

FOR JET FOG MACHINE USE ONLY

BUBBLE FLUID



FLM-05P

LIGHT FOG FLUID

► FLM-05P IS A SPECIAL FORMULATED WATER BASED FLUID FOR BATTERY OPERATED MACHINE. CAPABLE TO GENERATE PURE AND CLEAN FOG.

FOR MB-20X USE ONLY



FLM-05S

LIGHT FOG FLUID

► FLM-05S IS A SPECIAL FORMULATED WATER BASED FLUID FOR BATTERY OPERATED MACHINE. CAPABLE TO GENERATE PURE AND CLEAN FOG.

FOR MB-1 USE ONLY



BL BUBBLE FLUID

► WATER-BASED COMPOSITION THAT CREATES VIVID, TRANSPARENT BUBBLE. FOR B-100/B-200/W-101 USE ONLY

SNOW FLUID

FLUID



SL-CNT

- › SNOW FLUID CONCENTRATE.
- › MUST DILUTED BEFORE USE.



SL-UV

SNOWFLAKE 0000 BLIZZARD

- › PRODUCED UV EFFECT SNOWFLAKE THAT GLOWS IN THE DARK WITH UV LIGHT SOURCES.



SL-C

SNOWFLAKE 0000 BLIZZARD

- › ANTIFREEZE SNOW FLUID FOR LOW TEMPERATURE ENVIRONMENTS UP TO -10°C (14°F).



SL-H

SNOWFLAKE 0000 BLIZZARD

- › PRODUCE THE LARGEST VOLUME AND DRIEST SNOWFLAKES.



SL-AN

SNOWFLAKE 0000 BLIZZARD

- › PRODUCE SLIGHTLY LARGER SNOWFLAKES THAN SL-A.



SL-N

SNOWFLAKE 0000 BLIZZARD

- › MOST POPULAR SNOW FLUID
- › PRODUCE SLIGHTLY LARGER SNOWFLAKES THAN SL.



SL-A

SNOWFLAKE 0000 BLIZZARD

- › PRODUCE SLIGHTLY LARGER SNOWFLAKES THAN SL-N.



SL

SNOWFLAKE 0000 BLIZZARD

- › MILDEST FORMULA FOR SNOW EFFECT & FOAM EFFECT.

HAZE FLUID

ONLY COMPATIBLE WITH ANTARI HZ SERIESL :
HZ-100/HZ-350/HZ-400/HZ-500/HZ-1000



HZL-1

OIL-BASED HAZE FLUID

- › SPECIAL FORMULATED HAZE FLUID, A NON TOXIC COMPOSITION THAT PRODUCES A PURE, TRANSLUCENT HAZE EFFECT WITH A LONG HANGING TIME.



HZL-1W

WATER-BASED HAZE FLUID

- › SPECIAL FORMULATED HAZE FLUID, IT PRODUCES A SMOOTH HAZE EFFECT WITHOUT GREASY RESIDUE.



CHL-2

FOR CH-1 USE ONLY

- › SPECIAL FORMULATED OIL-BASED HAZE FLUID SPECIFICALLY FOR CH-1



MG-550

MAGICAN

- › THE SMALLEST HAZE SPRAY IN THE WORLD
- › 1 – 2 HRS HANG TIME
- › VISUAL EFFECT AFTER 20 SEC.
- › PERFECT FOR MOBILE DJS AND HOME PARTIES



C-300

PUMP LUBRICANT

- › SPECIALLY FORMULATED FOR PUMP MAINTENANCE.
- › APPLYING ON REGULAR BASIS TO KEEP THE PUMP AT ITS OPTIMAL CONDITION.
- › RECOMMEND USE IT BEFORE STORE MACHINES.



UVL-01

UV AGENT

- › FOR ALL SNOW / BUBBLE FLUID.
- › MIX 1 BOTTLE(100ML) WITH 5L OF SNOW/ BUBBLE FLUID.
- › MUST USE WITH A UV SOURCE TO VISUAL THE EFFECT.

SCENT

NOTE : MIX WITH FOG FLUID ONLY

SIMPLY PUT A FEW DROPS OF THESE HIGH QUALITY SCENT INTO THE FLUID TANK. YOU WILL HAVE SCENTED FOG RIGHT AWAY!
6 FRAGRANCES ARE AVAILABLE IN A STANDARD 20 ML BOTTLE.

THE IDEAL MIX RATIO OF SCENT AND FLUID IS 1:1000 FOR INSTANCE: ADDING 1ML SCENT INTO 1LITER FOG FLUID CAN HAVE THE BEST EFFECT OF SCENTED FOG.



*P-1
ROSE

*P-2
MINT

P-4
APPLE

*P-6
LEMON

*P-7
STRAWBERRY

*P-9
ORANGE



"ALTHOUGH A WATCH IS A STATEMENT OF CHARACTER AND FASHION, ITS PRIMARY PURPOSE IS TO MEASURE AND COMMUNICATE OUR MOST IMPORTANT RESOURCE.

THAT RESOURCE IS TIME. TIME IS THE ONE THING IN WHICH WE ARE ALL EQUAL.

WE CANNOT MAKE MORE OF IT NO MATTER HOW MUCH WE TRY. NO AMOUNT OF MONEY OR EFFORT WILL INFLUENCE ITS PASSING.

IN THE TIME WE HAVE AVAILABLE, EVERY MOMENT MUST BE SEIZED, EVERY OPPORTUNITY TAKEN.

IN A DAY — AN IDEA IS BORNE OF INSPIRATION

IN A WEEK — IDEAS DEVELOP INTO PROJECTS

IN A MONTH — A PROTOTYPE IS REALISED, READY FOR TESTING

IN A YEAR — A PRODUCT ENTERS THE MARKET, THE END RESULT OF TIME INVESTED AND PASSION COMMITTED

A LIFETIME — A RECORD OF ACHIEVEMENTS, OF DEVELOPED IDEAS, OF EFFORT AND ENTHUSIASM, FROM BEGINNINGS THROUGH GROWTH TO MATURITY; FROM OBSCURITY TO RECOGNITION.

THIS IS OUR COMMITMENT TO YOU. OUR TIME IS DEVOTED TO OUR PARTNERS, SUPPORTERS AND CLIENTS
— TO REACH OUR SHARED ASPIRATIONS."





2003
ORIGINAL VERSION



2004
X-SERIES



2005
X-SERIES



2006
ZII-SERIES



2007
ZII-SERIES



2008
M-5



2009
HZ-500



2010
DNG-200



2011
W-SERIES



2012
ECO-SERIES



2013
Z-SERIES



2014
F-5 FAZER



2015
M-7 RGBA



2016
F-7 SMAZE



2017
FT-200



2018
HZ-1000



2019
DNG-250



2020
M-9



2022
CH-1



2023



2024



2025



2026

ACCESSORIES LIST

INCLUDE

OPTIONAL

FOG



Z-800III



• Z-10



• Z-40



• Z-50



Z-1000III



• Z-10



• Z-1000III-HB



• Z-40



• Z-50



Z-1200III



• Z-1000III-HB



• Z-3



• Z-40



• Z-50



Z-1500III/ Z-3000III



• WTR-20



M-5



• M-20



• M-30PRO



• M-5-HB



M-10



• M-20



• M-30PRO



M-12



• WTR-110



• ES-W-DMX



• M-12-HB



M-8



• M-21



• M-31



• M-5-HB



W-508



• W-1



IP-1600/IP-3000



• W-2



• IP-1600-HB



J-100



• ES-W-DMX



• WTR-110



M-9



• W-2



• TIMO-WTR-90



• M-9-HB



M-7X



• W-2



• TIMO-WTR-90



Z-1520



• W-2



• FX-4



CH-1

• PRESSURE GAUGE
• AIR HOSE



• TIMO-W-DMX-PCB

• FCH-1

• AF-3S FAN TO FIT IN
FCH-1 FIGHT CASE

PORTABLE FOG MACHINE



MB-1

• FIGHT CASE



• BAT-01
• MB-1-BCL



• FLM-05S



• DCP-12
• POWER ADAPTOR
• DUMMY BATTERY



• MCT-2



• MCR-1F



MB-20X

• FIGHT CASE



• MB-20X-B
• MB-20X-BCL



• FLM-05P



• Z-3



• WTR-20



• MB-20XS

FAZE



F-1



• TIMO-W-DMX-PCBR



• WTR-10



• TIMO-WTR-40



F-6



• WTR-110



• ES-W-DMX



F-7X



• WTR-110



• ES-W-DMX



F-8



• WTR-110



• ES-W-DMX



F-12



• WTR-110



• ES-W-DMX



Z-350



• Z-3



• FZ-350



• FX-4



Z-390



• Z-3



• WTR-20

HAZER



HZ-350



• W-1



• HC-1



HZ-400



• HC-1



• HCR-1



HZ-1000



• TIMO-W-DMX-PCBR

LOW FOG



ICE-101



• Z-8

ACCESSORIES LIST

INCLUDE

OPTIONAL



DNG-50



1.5 METER FOG CONDUCTION HOSE



FTA-13



WTR-T10



ES-W-DMX



DNG-100



FT-10



FTA-11



DNG-250



CODNG0600



FDNG-250



FTA-13



FTA-200



CODNG0600

SNOW



S-100X/S-200X



SC-2



S-100X-HB
S-200X-HB



SW-300-FB



SW-250/SW-300



W-1



SW-300-HB
SW-250-HB



SC-2
- SW-250 OPTIONAL



SC-3
- SW-300 OPTIONAL



SW-300-FB



S-500



ST-500-HOSE
S-500 INCLUDED



ST-10
- S-500L INCLUDED
- S-500 OPTIONAL



PM-1



TIMO-W-DMX-PCBR



WTR-20



TIMO-WTR-70



SC-3



S-600



W-2



5 METER



TIMO-WTR-90



SC-4 CABLE
REMOTE



S-600-TKC



S-600-BH

FAN



AF-3(S)



WTR-10



Z-3



AF-6



SC-2



WTR-20



AF-10/AF-14



DUAL USE BRACKET



AFC-1



WTR-110



ES-W-DMX

BUBBLE



W-101



› W-1



› W-101-HB



B-200



› B-200-HB



› BCT-1



› BCR-1

SCENT



SCN-600



› SCN-600-HB

LIQUID SUPPLY



LCU-1S



› XLR 4-PIN



› 10METER 6 X 4MM TUBE



› FTA-64



› Z-8



› SC-2



› FLUID FILTER



LCU-2S



› XLR 3-PIN



› 12 METER 6 X 4MM TUBE
› 10 METER 4 X 2.5MM TUBE



› ADAPTOR
- 4 TO 4 MM ADAPTOR
- 6 TO 4 MM ADAPTOR



› FLUID FILTER

SPEC CHART

*OPTIMAL

MODEL	RATED POWER	WARM UP TIME	OUTPUT	FLUID TANK CAPACITY	HANGING BRACKET	REMOTE CONTROL	DMX	W-DMX	TIMER REMOTE	WIRELESS REMOTE	CONTINUOUS OUTPUT
AF-3/AF-3X AF-3S	127W	N/A	N/A	N/A	YES	*Z-3	YES	N/A	N/A	*WTR-10	YES
AF-6	250W	N/A	N/A	N/A	YES	*SC-2	YES	N/A	N/A	*WTR-20	YES
AF-10	120V 60W 240V 65W	N/A	N/A	N/A	YES	AFC-1	YES	*ES-W-DMX	N/A	*WTR-110	YES
AF-14	120V 190W 240V 145W	N/A	N/A	N/A	YES	AFC-1	YES	*ES-W-DMX	N/A	*WTR-110	YES
B-100	120V 30W 240V 32W	N/A	N/A	0.7 L	YES	N/A	N/A	N/A	N/A	N/A	YES
B-200	120W	N/A	N/A	2 L	YES	N/A	YES	N/A	*BCT-1	*BCR-1	YES
CH-1	120V 700W 240V 1250W	8 MIN (APPROX.)	N/A	2.5 L	N/A	N/A	YES	*TIMO-W-DMX-PCBR	N/A	N/A	YES
DNG-50	1200W	2 MIN (APPROX.)	50 M ² /MIN	2.4 L	N/A	N/A	YES	*ES-W-DMX	N/A	*WTR-110	YES
DNG-100	120V 750W 240V 600W	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
DNG-250	1600W	6 MIN (APPROX.)	120M ² /MIN	10 L	N/A	N/A	YES	N/A	N/A	N/A	YES
F-1	800W	4.5 MIN (APPROX.)	N/A	2.4 L	N/A	N/A	YES	*TIMO-W-DMX-PCBR *TIMO-WTR-40	N/A	*WTR-10 *TIMO-WTR-40	YES
F-6	1,450W	1 MIN (APPROX.)	N/A	5 L	N/A	N/A	YES	*ES-W-DMX	N/A	*WTR-110	YES
F-7X	100V 1400W 120V 1600W 240V 1900W	7 MIN (APPROX.)	N/A	5 L*2PCS	N/A	N/A	YES	*ES-W-DMX	N/A	*WTR-110	YES
F-8	240V 3500W	10 MIN (APPROX.)	N/A	20 L*2PCS	N/A	N/A	YES	*ES-W-DMX	N/A	*WTR-110	YES
F-12	100V 550W 120V 750W 240V 1400W	8 MIN (APPROX.) 6 MIN (APPROX.) 3 MIN (APPROX.)	N/A	5 L	N/A	N/A	YES	*ES-W-DMX	N/A	*WTR-110	YES
HZ-350	390W	N/A	N/A	2.5 L	N/A	N/A	YES	N/A	*HC-1	W-1	YES
HZ-400	470W	N/A	N/A	2.5 L	N/A	N/A	YES	N/A	HC-1	*HCR-1	YES
HZ-500	120V 400W 240V 480W	N/A	N/A	2.5 L	N/A	N/A	YES	N/A	N/A	N/A	YES
HZ-1000	1150W	N/A	N/A	6.4 L	N/A	N/A	YES	*TIMO-W-DMX-PCBR	N/A	N/A	YES
ICE-101	1130W	4.5 MIN (APPROX.)	43M ² /MIN	2.4 L	N/A	N/A	YES	N/A	Z-8	N/A	NO
IP-1600	1500W	12 MIN (APPROX.)	N/A	N/A	YES	N/A	YES	N/A	N/A	W-2	YES
IP-3000	120V 1700W 240V 2500W	20 MIN (APPROX.) 12 MIN (APPROX.)	N/A	N/A	YES	N/A	YES	N/A	N/A	W-2	YES
J-100	240V 1200W	8.5 MIN (APPROX.)	14 METERS HEIGHT	4 L	YES	N/A	YES	*ES-W-DMX	N/A	*WTR-110	N/A
LCU-1S	40W	N/A	N/A	N/A	N/A	N/A	YES	N/A	N/A	N/A	N/A
LCU-2S	55W	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

MODEL	RATED POWER	WARM UP TIME	OUTPUT	FLUID TANK CAPACITY	HANGING BRACKET	REMOTE CONTROL	DMX	W-DMX	TIMER REMOTE	WIRELESS REMOTE	CONTINUOUS OUTPUT
M-5	1500W	8 MIN (APPROX.)	N/A	10 L	*M-5-HB	M-20	YES	N/A	M-20	*M-30PRO	YES
M-7X	1516W	7 MIN (APPROX.)	10 METERS HEIGHT	2.4 L	N/A	N/A	YES	*TIMO-WTR-90	N/A	W-2	NO
M-8	1700W	9.5 MIN (APPROX.)	N/A	10 L	*M-5-HB	M-21	YES	N/A	M-21	*M-31	NO
M-9	1820W	14 MIN (APPROX.)	10 METERS HEIGHT	6 L	*M-9-HBX2	N/A	YES	*TIMO-WTR-90	N/A	W-2	NO
M-10	3000W	9.5 MIN (APPROX.)	N/A	10 L	N/A	M-20	YES	N/A	M-20	*M-30PRO	YES
M-12	2000W	13 MIN (APPROX.)	N/A	10 L	*M-12-HB	N/A	YES	*ES-W-DMX	N/A	*WTR-110	YES
MB-1	75W	1SEC	N/A	110 ML	N/A	N/A	N/A	N/A	*MCT-2	*MCR-1F	YES
MB-20X	600W	1SEC	N/A	0.4 L	N/A	*Z-3	YES	N/A	N/A	*WTR-20	YES
S-100X	880W	N/A	5 METERS	5 L	YES	SC-2	YES	N/A	N/A	N/A	YES
S-200X	880W	N/A	5 METERS	5 L	YES	SC-2	YES	N/A	N/A	N/A	YES
SW-250	900W	N/A	5 METERS	5 L	YES	*SC-2	YES	N/A	N/A	W-1	YES
SW-300	880W	N/A	6 METERS	5 L	YES	*SC-3	YES	N/A	N/A	W-1	YES
S-500	900W	N/A	6 METERS	20 L	N/A	*SC-3	YES	*TIMO-W-DMX PCBR *TIMO-WTR-70	N/A	*WTR-20 *TIMO-WTR-70	YES
S-600	1200W	N/A	18 METERS	N/A	YES	*SC-4	YES	*TIMO-WTR-90	N/A	W-2	YES
SCN-600	7W	N/A	N/A	150 ML	*SCN-600-HB	N/A	YES	N/A	N/A	N/A	YES
W-101	32W	N/A	N/A	0.7 L	YES	N/A	N/A	N/A	N/A	W-1	YES
W-508	800W	2 MIN (APPROX.)	N/A	0.8 L	N/A	N/A	N/A	N/A	N/A	W-1	YES
Z-350	120V 700W 240V 750W	4.5 MIN (APPROX.)	N/A	1.3 L	N/A	*Z-3	YES	N/A	N/A	N/A	YES
Z-390	120V 1000W 240V 1450W	1.5 MIN (APPROX.)	N/A	4 L	YES	*Z-3	YES	N/A	N/A	*WTR-20	YES
Z-1520	1516W	5 MIN (APPROX.)	6 METERS HEIGHT	2.4 L	N/A	N/A	YES	N/A	N/A	W-2	NO
Z-800III	800W	2 MIN (APPROX.)	N/A	0.8 L	N/A	Z-10	N/A	N/A	*Z-40	*Z-50	YES
Z-1000III	1000W	6 MIN (APPROX.)	N/A	1.7 L	YES	Z-10	YES	N/A	*Z-40	*Z-50	NO
Z-1200III	1200W	11 MIN (APPROX.)	N/A	2.5 L	YES	*Z-3	YES	N/A	*Z-40	*Z-50	YES
Z-1500III	1500W	9 MIN (APPROX.)	N/A	6 L	N/A	N/A	YES	N/A	N/A	*WTR-20	YES
Z-3000III	2500W	10 MIN (APPROX.)	N/A	6 L	N/A	N/A	YES	N/A	N/A	*WTR-20	YES